


Prepared For:

HOUSTON-GALVESTON AREA C
 Neal Witty
 3555 TIMMONS
 HOUSTON,, TX 77227-2777
 (713)627 - 3200
 Reference ID: N/A

Presented By:

HOLT TRK CTRS OF TX, LLC
 Carlos Weeber
 8900 NORTH LOOP E
 HOUSTON TX 77029 - 1218
 (713)674-3444

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

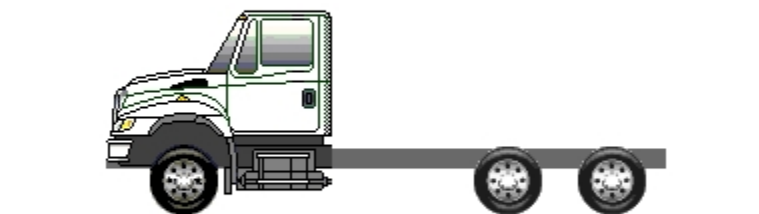

Model Profile
2027 HV615 SBA (HV615)

AXLE CONFIG:	6X4
APPLICATION:	Stake Flat
MISSION:	Requested GVWR: 52000. Calc. GVWR: 52000. Calc. GCWR: 110000 Calc. Start / Grade Ability: 53.85% / 2.51% @ 55 MPH Calc. Geared Speed: 94.5 MPH
DIMENSION:	Wheelbase: 181.00, CA: 112.00, Axle to Frame: 53.00
ENGINE, DIESEL:	{International S13} EPA 2024, 400HP @ 1800 RPM, 1450 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 400 Peak HP (Max)
TRANSMISSION, MANUAL:	{International T14 1450 lb-ft OD} 14-Speed Fully Automated Manual, Overdrive Optimized, Aluminum Clutch Housing, Pneumatic Shift Control, Electronic Clutch Actuation, Internal Lube Oil Pump, Hill Start Aid
CLUTCH:	{International 430MM} Maintenance Free, Self-Adjusting, 17" (430 mm) Dia Single Plate, Diaphragm Spring, Organic, 5-Spring, Coaxial, 285mm Damper with Pre-Damper, 2"-24 Tooth Spline, Hydraulic-Electric Actuation Pull Type Control, 1850 lb-ft (2508 Nm) Torque Capacity
AXLE, FRONT NON-DRIVING:	{Meritor MFS+ (MFS-12E-132B)} Wide Track, I-Beam Type, 12,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor MT-40-14X-4DFR} Single Reduction, 40,000-lb Capacity, .433"(11mm) Wall Housing Thickness, R Wheel Ends Gear Ratio: 3.25
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position
SUSPENSION, REAR, TANDEM:	{International} 4-Spring, 40,000-lb Capacity, 52" Axle Spacing, Multileaf Springs
PAINT:	Cab schematic 100WX Location 1: 9219, Winter White (Std) Chassis schematic N/A

Code	Description
HV61500	Base Chassis, Model HV615 SBA with 181.00 Wheelbase, 112.00 CA, and 53.00 Axle to Frame.
1AND	AXLE CONFIGURATION 6x4
	<u>Notes</u> : Pricing may change if axle configuration is changed.
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL
1LNR	BUMPER, FRONT Swept Back, Steel, Painted 0001 Canyon Black, Heavy Duty
1WHN	WHEELBASE RANGE 152" (385cm) Through and Including 181" (460cm)
2AVL	AXLE, FRONT NON-DRIVING {Meritor MFS+ (MFS-12E-132B)} Wide Track, I-Beam Type, 12,000-lb Capacity
3ADC	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 12,000-lb Capacity, with Shock Absorbers
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6
4AZJ	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System, with Automatic Traction Control
4EDL	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 120 psi Cut-In/140 psi Cut-Out, Integrated PuraGuard Coalescing Filtration
4EXP	BRAKE CHAMBERS, FRONT AXLE {Bendix} 20 SqIn
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic
4SPT	AIR COMPRESSOR {Bendix ESS 380} 16.8 CFM, Head Unload
4VGA	AIR DRYER LOCATION Mounted Outside Right Rail, Forward of Front Wheel
4VMR	AIR TANK LOCATION (3) : Two Tanks Vertically Stacked, Outside Right Rail, Under Cab in Front of Aftertreatment Box, Perpendicular to Rail, One Mounted Below Left Rail, Front of Rear Suspension, Parallel to Rail
4WWZ	DRAIN VALVE (3) with Pull Chains for Air Tanks
4XDP	BRAKES, FRONT {Meritor 16.5X5 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 5", 14,700-lb Capacity
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type
5AAA	STEERING COLUMN Stationary
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black

<u>Code</u>	<u>Description</u>
5PRV	STEERING GEAR {TRW THP60} Power
6DJK	DRIVELINE SYSTEM {Dana Spicer} SPL250 Lite Main Driveline with SPL170 Interaxle Shaft, for 6x4
7BEV	AFTERTREATMENT COVER Steel, Black
7BLV	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Short Horizontal Tail Pipe, Frame Mounted Right Side Back of Cab
7SDX	ENGINE COMPRESSION BRAKE Omit
7WDR	TAIL PIPE (1) Horizontal, Short
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8GXJ	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RMS	SPEAKERS Omit
8RMX	RADIO Omit, Includes Wiring and Antenna
8RPP	ANTENNA Shark Fin, Roof Mounted
8VBE	HORN, ELECTRIC (1) Trumpet Style
8VUL	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Left Side Back of Cab
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XNG	STARTING MOTOR {Mitsubishi Electric Automotive America DP60} 12-Volt
8XNY	HEADLIGHTS Halogen
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HCX	GRILLE Stationary, Molded in Black
9WBM	FRONT END Tilting, Fiberglass, with Three Piece Construction, Sloped Front
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u>
	: PAINT SCHEMATIC ID LETTERS "WN"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

<u>Code</u>	<u>Description</u>
10AGB	CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.
10XBU	SPECIAL RATING, GVWR Limited to 68,000-lb GVWR
11MHT	CLUTCH {International 430MM} Maintenance Free, Self-Adjusting, 17" (430 mm) Dia Single Plate, Diaphragm Spring, Organic, 5-Spring, Coaxial, 285mm Damper with Pre-Damper, 2"-24 Tooth Spline, Hydraulic-Electric Actuation Pull Type Control, 1850 lb-ft (2508 Nm) Torque Capacity
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12BGS	ENGINE, DIESEL {International S13} EPA 2024, 400HP @ 1800 RPM, 1450 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 400 Peak HP (Max)
12TAB	POWERTRAIN INTERFACE MODULE
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u> : FAN Nylon
12VBY	AIR CLEANER Single Element, Engine Mounted
12VKJ	EMISSION, CALENDAR YEAR {International S13} EPA, OBD and GHG Certified for Calendar Year 2026
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty
12XCY	RADIATOR Aluminum, Cross Flow, 1144 SqIn, with 1007 SqIn Charge Air Cooler
13HAE	TRANSMISSION, MANUAL {International T14 1450 lb-ft OD} 14-Speed Fully Automated Manual, Overdrive Optimized, Aluminum Clutch Housing, Pneumatic Shift Control, Electronic Clutch Actuation, Internal Lube Oil Pump, Hill Start Aid
13HAP	PTO, TRANSMISSION Omit, Includes PTO Prep Harness to Transmission, for T14 Transmission
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission
13WML	DRIVE MODE Allows Driver to Select Drive Mode (Performance, Performance Plus & Off Road), Includes Switch, for T14 Transmission
13WMM	TRANSMISSION OIL {SAE 75W80} Synthetic; 22 thru 33.99 Pints
14GVY	AXLE, REAR, TANDEM {Meritor MT-40-14X-4DFR} Single Reduction, 40,000-lb Capacity, .433"(11mm) Wall Housing Thickness, R Wheel Ends . Gear Ratio: 3.25
14UNA	SUSPENSION, REAR, TANDEM {International} 4-Spring, 40,000-lb Capacity, 52" Axle Spacing, Multileaf Springs
15LNZ	FUEL HEATER PLUMBING Plumbing for Blender Valve Integrated in Fuel Water Separator, Thermostatically Controlled, for S13 Engine
15LPU	FUEL/WATER SEPARATOR {Racor 6600} Pre-Filter and Filter Base, Includes Water-in-Fuel Sensor
15LRE	LOCATION FUEL/WATER SEPARATOR Mounted Under Hood, Left Side, Above Front Axle

Code	Description
15SRE	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 50 US Gal (189L), Mounted Left Side, Under Cab
15WEY	DEF TANK 10.8 US Gal (41L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
16400	SEAT, PASSENGER Omit Item
16BAM	AIR CONDITIONER with Integral Heater and Defroster
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer
	<u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)
16HGN	GAUGE, AIR APPLICATION
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16KZW	SEAT, DRIVER {National 2000 195} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Angle Back Adjust
16SNL	MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"
16VKB	CAB INTERIOR TRIM Classic, for Day Cab
	<u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16VLU	CAB REAR SUSPENSION Air Suspension, for High Cab Height
16VLV	MONITOR, TIRE PRESSURE Omit
16XCK	WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors
16XJN	INSTRUMENT PANEL Flat Panel
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab
27DUW	WHEELS, FRONT {Accuride 51408} DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DUW	WHEELS, REAR {Accuride 51408} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
7372135809	(2) TIRE, FRONT 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position
7372135809	(8) TIRE, REAR 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position

<u>Code</u>	<u>Description</u>
	Services Section:
40127	WARRANTY Standard for HV513/HV515, HV613/HV615 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2030A

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Total Factory List Price Including Options:		\$110,865.00
Total Freight:		\$3,100.00
Total Factory List Price Including Freight:		\$113,965.00
Total Vehicle Price:		\$113,965.00
Total Sale Price:		\$113,965.00
Total Per Vehicle Sales Price:		\$113,965.00
Net Sales Price:		\$113,965.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

International Motors, LLC d/b/a International Motors USA LLC in Illinois and Ohio.