


Prepared For:

HOUSTON-GALVESTON AREA C
 Neal Witty
 3555 TIMMONS
 HOUSTON,, TX 77227-2777
 (713)627 - 3200
 Reference ID: N/A

Presented By:

HOLT TRK CTRS OF TX, LLC
 Carlos Weeber
 8900 NORTH LOOP E
 HOUSTON TX 77029 - 1218
 (713)674-3444

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

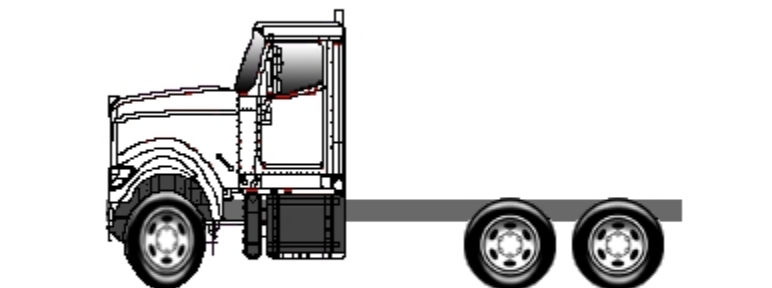

Model Profile
2027 HX520 SFA (HX520)

AXLE CONFIG:	6X4
APPLICATION:	Stake Flat
MISSION:	Requested GVWR: 52000. Calc. GVWR: 52000. Calc. GCWR: 110000 Calc. Start / Grade Ability: 53.85% / 2.23% @ 55 MPH Calc. Geared Speed: 94.5 MPH
DIMENSION:	Wheelbase: 199.00, CA: 109.00, Axle to Frame: 59.00
ENGINE, DIESEL:	{International S13} EPA 2024, 400HP @ 1800 RPM, 1450 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 400 Peak HP (Max)
TRANSMISSION, MANUAL:	{International T14 1450 lb-ft OD} 14-Speed Fully Automated Manual, Overdrive Optimized, Aluminum Clutch Housing, Pneumatic Shift Control, Electronic Clutch Actuation, Internal Lube Oil Pump, Hill Start Aid
CLUTCH:	{International 430MM} Maintenance Free, Self-Adjusting, 17" (430 mm) Dia Single Plate, Diaphragm Spring, Organic, 5-Spring, Coaxial, 285mm Damper with Pre-Damper, 2"-24 Tooth Spline, Hydraulic-Electric Actuation Pull Type Control, 1850 lb-ft (2508 Nm) Torque Capacity
AXLE, FRONT NON-DRIVING:	{Meritor MFS-12-143A} Wide Track, I-Beam Type, 12,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor MT-40-14X-4DFR-P} Single Reduction, 40,000-lb Capacity, with Lube Oil Pump, . 433"(11mm) Wall Housing Thickness, R Wheel Ends Gear Ratio: 3.25
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position
SUSPENSION, REAR, TANDEM:	{Hendrickson RT-403} Walking Beam, 40,000-lb Capacity, 54" Axle Spacing, Multileaf Springs, with Rubber Center Bushings
PAINT:	Cab schematic 100LY Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
HX52000	Base Chassis, Model HX520 SFA with 199.00 Wheelbase, 109.00 CA, and 59.00 Axle to Frame.
1AND	AXLE CONFIGURATION 6x4
	<u>Notes</u> : Pricing may change if axle configuration is changed.
1CGC	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 12.250" x 3.380" x 0.375" (304.8mm x 85.6mm x 9.5mm); 550.0" (13970mm) Maximum OAL
1LPG	BUMPER, FRONT Gull Wing, Aluminum, Stainless Steel Clad, Heavy Duty
1WXC	WHEELBASE RANGE 169" (430cm) Through and Including 209" (530cm)
2ARW	AXLE, FRONT NON-DRIVING {Meritor MFS-12-143A} Wide Track, I-Beam Type, 12,000-lb Capacity
3ADC	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 12,000-lb Capacity, with Shock Absorbers
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE SR-7 with relay valve for 6x4/8x6
4AZJ	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System, with Automatic Traction Control
4EDL	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 120 psi Cut-In/140 psi Cut-Out, Integrated PuraGuard Coalescing Filtration
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic
4SPT	AIR COMPRESSOR {Bendix ESS 380} 16.8 CFM, Head Unload
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab
4VKK	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Back of Cab, Perpendicular to Rail
4WXR	DRAIN VALVE (2) {Berg} with Pull Chains, for Air Tanks
4XDP	BRAKES, FRONT {Meritor 16.5X5 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 5", 14,700-lb Capacity
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type
5710	STEERING COLUMN Tilting and Telescoping
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PSA	STEERING GEAR {Sheppard M100} Power
6DJK	DRIVELINE SYSTEM {Dana Spicer} SPL250 Lite Main Driveline with SPL170 Interaxle Shaft, for 6x4

<u>Code</u>	<u>Description</u>
7BEU	AFTERTREATMENT COVER Aluminum
7BLY	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Cab Mounted Right Side
7SDZ	ENGINE COMPRESSION BRAKE {International} for S13 Engines, with Selector Switch and On/Off Switch
7WDM	EXHAUST HEIGHT 10'
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum
7WDT	TAIL PIPE (1) Straight Type
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
8653	HORN, AIR Single, Located Under Cab
8GXJ	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RJW	CB RADIO Omit Power Feeds, Power Source and Wiring
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8RMX	RADIO Omit, Includes Wiring and Antenna
8RPR	ANTENNA for Increased Roof Clearance Applications
8VAY	HORN, ELECTRIC Disc Style
8VUK	BATTERY BOX Aluminum, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab
8WEZ	TURN SIGNAL SWITCH Self-Canceling
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XNG	STARTING MOTOR {Mitsubishi Electric Automotive America DP60} 12-Volt
8XNY	HEADLIGHTS Halogen
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9ASE	FRONT END Tilting, Composite
9HCN	GRILLE Chrome Vertical Accent Bars, with Black Mesh
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10AGB	CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan

<u>Code</u>	<u>Description</u>
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.
	<u>Notes</u> : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.
10XBU	SPECIAL RATING, GVWR Limited to 68,000-lb GVWR
11MHT	CLUTCH {International 430MM} Maintenance Free, Self-Adjusting, 17" (430 mm) Dia Single Plate, Diaphragm Spring, Organic, 5-Spring, Coaxial, 285mm Damper with Pre-Damper, 2"-24 Tooth Spline, Hydraulic-Electric Actuation Pull Type Control, 1850 lb-ft (2508 Nm) Torque Capacity
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12BGS	ENGINE, DIESEL {International S13} EPA 2024, 400HP @ 1800 RPM, 1450 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 400 Peak HP (Max)
12TAB	POWERTRAIN INTERFACE MODULE
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u> : FAN Nylon
12VCA	AIR CLEANER Single Element, with Pre-Cleaner, Engine Mounted
12VKJ	EMISSION, CALENDAR YEAR {International S13} EPA, OBD and GHG Certified for Calendar Year 2026
12WCX	HOSE CLAMPS, RADIATOR HOSES {Gates} Shrink Band Type
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood
12WYZ	RADIATOR DRAIN & FILL FITTING SPECIAL; To Vacuum Out or Fill the Cooling System from the Bottom of Radiator, for Use with Quick-Connect Radiator Drain Tool or Shop Coolant Evacuation-Fill System
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations
12XBC	RADIATOR Aluminum, Welded, Down Flow, Front to Back System, 1325 SqIn, with 806 SqIn Charge Air Cooler
	<u>Includes</u> : RADIATOR HOSES Premium, Rubber
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty
13HAE	TRANSMISSION, MANUAL {International T14 1450 lb-ft OD} 14-Speed Fully Automated Manual, Overdrive Optimized, Aluminum Clutch Housing, Pneumatic Shift Control, Electronic Clutch Actuation, Internal Lube Oil Pump, Hill Start Aid
13HAP	PTO, TRANSMISSION Omit, Includes PTO Prep Harness to Transmission, for T14 Transmission
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission
13WML	DRIVE MODE Allows Driver to Select Drive Mode (Performance, Performance Plus & Off Road), Includes Switch, for T14 Transmission
13WMM	TRANSMISSION OIL {SAE 75W80} Synthetic; 22 thru 33.99 Pints
14GVU	AXLE, REAR, TANDEM {Meritor MT-40-14X-4DFR-P} Single Reduction, 40,000-lb Capacity, with Lube Oil Pump, .433"(11mm) Wall Housing Thickness, R Wheel Ends . Gear Ratio: 3.25

<u>Code</u>	<u>Description</u>
14UHD	SUSPENSION, REAR, TANDEM {Hendrickson RT-403} Walking Beam, 40,000-lb Capacity, 54" Axle Spacing, Multileaf Springs, with Rubber Center Bushings
15LNZ	FUEL HEATER PLUMBING Plumbing for Blender Valve Integrated in Fuel Water Separator, Thermostatically Controlled, for S13 Engine
15LPU	FUEL/WATER SEPARATOR {Racor 6600} Pre-Filter and Filter Base, Includes Water-in-Fuel Sensor
15SGL	FUEL TANK Non-Polished Aluminum, 24" Dia, 80 US Gal (303L), Mounted Left Side, Under Cab
15WEY	DEF TANK 10.8 US Gal (41L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
	<u>Includes</u>
	: CAB REAR SUSPENSION Air
	: CLEARANCE/MARKER LIGHTS (5) LED Roof Mounted
	: COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window
	: CONSOLE, CENTER Includes Two Cup Holders and One Additional Storage Area
	: CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger
	: COURTESY LIGHT (2) Driver and Passenger Door Mounted
	: DOME LIGHT, CAB Rectangular, Door and Instrument Panel Mounted Switch Activated, Timed Theater Dimming, Center Mounted, Integral to Console
	: FLOOR COVERING Rubber, Black
	: GLASS, ALL WINDOWS Tinted
	: GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side
	: GRAB HANDLE, CAB INTERIOR (4) "B" Pillar and Door Mounted, Two Each Side
	: READING LIGHT, CAB Located in Overhead Console
	: STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door
16400	SEAT, PASSENGER Omit Item
16BAM	AIR CONDITIONER with Integral Heater and Defroster
	<u>Includes</u>
	: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer
	<u>Includes</u>
	: GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for
	: GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure
	: WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)
16HGN	GAUGE, AIR APPLICATION
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16LWK	SEAT, DRIVER {ISRI} Series 300, Air Suspension, High Back, Vinyl, Single Chamber Lumbar, Inboard Armrest, Suspension Cover, Fore/Aft Isolator, Cushion Extension, Seat Tilt
16SDC	GRAB HANDLE, EXTERIOR (2) Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left and Right Side at B-Pillar
16SNL	MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width
	<u>Notes</u>
	: Mirror Dimensions are Rounded to the Nearest 0.5"

<u>Code</u>	<u>Description</u>
16VKK	CAB INTERIOR TRIM Diamond, for Day Cab
16VLV	MONITOR, TIRE PRESSURE Omit
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature
16XJP	INSTRUMENT PANEL Wing Panel
16XRX	MODESTY PANEL Painted
16XTM	ACCESS, CAB Aluminum, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab or Sleeper Cab
27DUW	WHEELS, FRONT {Accuride 51408} DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DUW	WHEELS, REAR {Accuride 51408} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
7372135809	(2) TIRE, FRONT 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position
7372135809	(8) TIRE, REAR 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position

Services Section:

40132	WARRANTY Standard for HX520, HX620, Effective with Vehicles Built January 1, 2021 or Later, CTS-2015B
-------	---

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Total Factory List Price Including Options:		\$121,620.00
Total Freight:		\$3,100.00
Total Factory List Price Including Freight:		\$124,720.00
Total Vehicle Price:		\$124,720.00
Total Sale Price:		\$124,720.00
Total Per Vehicle Sales Price:		\$124,720.00
Net Sales Price:		\$124,720.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

International Motors, LLC d/b/a International Motors USA LLC in Illinois and Ohio.