


Prepared For:
 HOUSTON-GALVESTON AREA C
 Neal Witty
 3555 TIMMONS
 HOUSTON,, TX 77227-2777
 (713)627 - 3200
 Reference ID: N/A

Presented By:
 HOLT TRK CTRS OF TX, LLC
 Carlos Weeber
 8900 NORTH LOOP E
 HOUSTON TX 77029 - 1218
 (713)674-3444

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

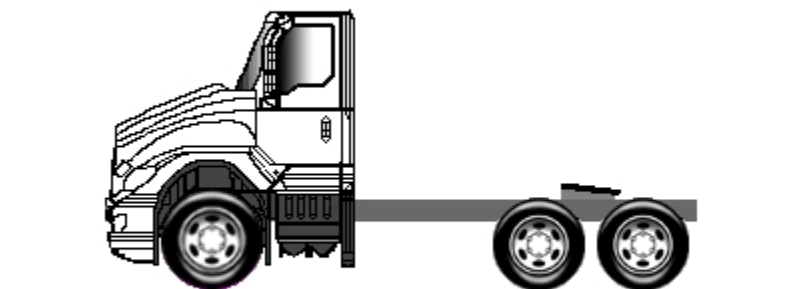

Model Profile
2027 LT625 6x4 (LT62F)

APPLICATION:	General Freight Regional Haul (DayCab)
MISSION:	Requested GCWR: 53200. Calc. GCWR: 115000. Calc. GVWR: 53200 Calc. Start / Grade Ability: 44.74% / 2.27% @ 65 MPH Calc. Geared Speed: 94.9 MPH
DIMENSION:	Wheelbase: 193.00, CA: 118.40, Axle to Frame: 53.00
ENGINE, DIESEL:	{International S13} EPA 2024, 430HP @ 1800 RPM, 1550 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 430 Peak HP (Max)
TRANSMISSION, MANUAL:	{International T14 1550 lb-ft DD} 14-Speed Fully Automated Manual, Direct Drive Optimized, Aluminum Clutch Housing, Pneumatic Shift Control, Electronic Clutch Actuation, Internal Lube Oil Pump, Hill Start Aid
CLUTCH:	{International 430MM} Maintenance Free, Self-Adjusting, 17" (430 mm) Dia Single Plate, Diaphragm Spring, Organic, 5-Spring, Coaxial, 285mm Damper with Pre-Damper, 2"-24 Tooth Spline, Hydraulic-Electric Actuation Pull Type Control, 1850 lb-ft (2508 Nm) Torque Capacity
AXLE, FRONT NON-DRIVING:	{Hendrickson Steertek NXT} Wide Track, Fabricated Type, 13,200-lb Capacity
AXLE, REAR, TANDEM:	{Meritor MT-40-14X-4CFR} Single Reduction, Amboid Gearing in Rear-Rear Axle, 40,000-lb Capacity, .433"(11mm) Wall Housing Thickness, R Wheel Ends Gear Ratio: 2.47
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 295/75R22.5 Load Range H ECOPLUS HS3+ (CONTINENTAL), 519 rev/mile, 75 MPH, All- Position
TIRE, REAR:	(8) 295/75R22.5 Load Range G HDL3 LTL (CONTINENTAL), 512 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, AIR, TANDEM:	{International} Ride Optimized Suspension (IROS), 40,000-lb Capacity, 52" Axle Spacing, 9.25" Ride Height, with Shock Absorbers
PAINT:	Cab schematic 100HX Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
LT62F00	Base Chassis, Model LT625 6x4 with 193.00 Wheelbase, 118.40 CA, and 53.00 Axle to Frame.
1570	TOW HOOK, FRONT (2) Frame Mounted
1616	FRAME RAILS WITH TAPERED REAR
1CBW	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.250" x 3.610" x 0.375" (260.4mm x 91.7mm x 9.5mm); 466.5" (11850mm) Maximum OAL
1MBS	BUMPER, FRONT Contoured, Aluminum, Stainless Steel Clad, with Black Plastic Filler Panels, Less Valance Panel for Increased Ground Clearance
1WKK	WHEELBASE RANGE 187" (475cm) Through and Including 219" (555cm)
2AUH	AXLE, FRONT NON-DRIVING {Hendrickson Steertek NXT} Wide Track, Fabricated Type, 13,200-lb Capacity
3AJK	SUSPENSION, FRONT, SPRING Monoleaf, Shackle Type, 13,200-lb Capacity, with Shock Absorbers
4092	BRAKE SYSTEM, AIR Dual System for Tractor Applications
	<u>Includes</u>
	: BRAKE LINES Color and Size Coded Nylon
	: BRAKE PRESSURE INDICATOR Low Air Pressure Warning Light and Audible Alarm
	: DRAIN VALVE Manually Operated (On Wet Tank Only)
	: GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster
	: GLAD HANDS (2) One for Service and One for Emergency; Trailer Hoses from Cab
	: HAND CONTROL VALVE, AIR with Self Return Handle, for Trailer Brakes, Mounted in Instrument Panel
	: HOSE TENDER Back of Cab Mounted
	: PARKING BRAKE CONTROL Yellow and Red Knobs, Located on Instrument Panel
	: PARKING BRAKE VALVE Combination Valve for Tractor and Trailer
	: QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for Forward Rear Axle
	: TRACTOR PROTECTION VALVE
	<u>Notes</u>
	: Front and Rear Dust Shields not Included
	: Rear Axle is Limited to 40,000-lb GAWR with Code 04092 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered
4AZY	AIR BRAKE ABS {Bendix AntiLock Brake System} 6-Channel (6 Sensor/6 Modulator) Electronic Stability Program, with Automatic Traction Control
4EDL	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 120 psi Cut-In/140 psi Cut-Out, Integrated PuraGuard Coalescing Filtration
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake
	<u>Includes</u>
	: BRAKE CHAMBERS, POSITION (2) Rear Parking; WITH TRUCK BRAKES: All 4x2, 4x4; WITH TRACTOR BRAKES: All 4x2, 4x4; 6x4 & 6x6 with Rear Tandem Axles Less Than 46,000-lb. or GVWR Less Than 54,000-lb.
	: BRAKE CHAMBERS, POSITION (4) Rear Parking; WITH TRUCK BRAKES: All 6x4, 6x6; WITH TRACTOR BRAKES: 6x4 & 6x6 with Rear Tandem Axles 46,000-lb. or Greater or GVWR of 54,000-lb. or Greater
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic
4SPT	AIR COMPRESSOR {Bendix ESS 380} 16.8 CFM, Head Unload
4VHW	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Left Rail, Under Cab; Perpendicular to Rail

<u>Code</u>	<u>Description</u>
4WXR	DRAIN VALVE (2) {Berg} with Pull Chains, for Air Tanks
4WZE	TRAILER HOSES AND CABLES {Phillips} Straight, 3 IN 1, Rubber Hose 15' Working Length, Aluminum Glad Hands with Rubber Seals and Hand Holds, Lighting Cable with Zinc Die Cast Plug
4XDE	BRAKES, REAR {Meritor 16.5X7 Q-PLUS LW} Air S-Cam Type, Fabricated Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 20,000-lb Capacity per Axle
4XDP	BRAKES, FRONT {Meritor 16.5X5 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 5", 14,700-lb Capacity
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type
5710	STEERING COLUMN Tilting and Telescoping
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PRV	STEERING GEAR {TRW THP60} Power
6DJL	DRIVELINE SYSTEM {Dana Spicer} Service Free SPL250 Lite Main Driveline with SPL170 Interaxle Shaft, for 6x4
7BEU	AFTERTREATMENT COVER Aluminum
7BLW	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7SDZ	ENGINE COMPRESSION BRAKE {International} for S13 Engines, with Selector Switch and On/Off Switch
7WBA	TAIL PIPE (1) Turnback Type, Bright
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel
7WBU	EXHAUST HEIGHT 11' 6"
7WZX	SWITCH, FOR EXHAUST 3 Position, Momentary, Lighted Momentary, ON/CANCEL, Center Stable, INHIBIT REGEN, Mounted in IP Inhibits Diesel Particulate Filter Regeneration When Switch is Moved to ON While Engine is Running, Resets When Ignition is Turned OFF
	<u>Includes</u> : NOTE: This feature momentarily inhibits after treatment regeneration. This feature is primarily intended for bulk carriers during loading and unloading operations.
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u> : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : HORN, ELECTRIC Single : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : POWER SOURCE Cigar Type Receptacle with Cap, USB Port, Located in Instrument Panel : STARTER SWITCH Electric, Key Operated : TURN SIGNAL SWITCH Manual Cancelling with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered
8541	HORN, ELECTRIC (2) Disc Style
8GGG	ALTERNATOR {Delco Remy 36SI} Brushless, 12 Volt, 165 Amp Capacity, Pad Mount, with Remote Sense

<u>Code</u>	<u>Description</u>
8NBH	BATTERY SYSTEM {JCI} Maintenance-Free, (3) 12-Volt 2250CCA Total, Top Threaded Stud
8RMW	SPEAKERS (2) 6.5" Coax Mounted in Doors, (2) 5.25" Coax Mounted in B-Pillars
8RNB	CB RADIO Accommodation Package, Header Mounted, Feeds from Accessory Side of Ignition Switch, Includes Power Source, One Antenna and Antenna Base with Wiring on Left Side Mirror
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input
8THB	BACK-UP ALARM Electric, 102 dBA
8TPP	STOP, TURN, TAIL & B/U LIGHTS Multi-Function Lamp, with LED Lights for Stop, Turn, Tail and Backup Lights, Includes LED License Plate Light
8TUT	COLLISION MITIGATION SYSTEM Omit
8TVL	COLLISION WARNING SYSTEM {Bendix BlindSpotter} Side Object Detection System; Includes Right Side Radar & Side Display, with Speed-Based Dynamic Detection Range
8WAA	LIGHT, WORK {Truck Lite 81 Series} LED, Pedestal Mounted, Back of Cab, with Switch on Instrument Panel
8WBW	JUMP START STUD 12V, Remote Mounted
	<u>Includes</u> : JUMP START STUD Mounted to Battery Box
8WGU	BATTERY BOX COVER Aluminum
8WJV	BATTERY DISCONNECT SWITCH {Joseph Pollak} for Cab Power Disconnect Switch, Disconnects Power to Power Distribution Center (PDC), Does Not Disconnect Charging Circuits, Lever Operated, Cab Mounted
8WKR	WIRING, FEEDER DATA TERMINAL Cab Wiring for "Feeder Data Terminal" FDT System; Includes Extra 9-Pin Diagnostic Connector Located Behind the Instrument Panel
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XHC	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner when Vehicle Park Brake is "NOT" Set, with Ignition "ON" or "OFF" and any Door Opened and Brake Pedal Released
8XHK	BATTERY BOX Aluminum, 30" Wide, 2-4 Battery Capacity, Mounted Left Side Under Cab
8XHN	HORN, AIR Single Trumpet, Black, with Lanyard Pull Cord
8XHX	SWITCH, MARKER INTERRUPT for Marker Lights and Headlights, Located in Steering Wheel
8XJC	BATTERY WIRING MODIFICATION Battery Discharge Protection System; Control thru Body Controller
8XJH	FOG LIGHTS (2) Clear Lens, LED, Rectangular, with White Light Source
8XMB	CONNECTOR, DASH, CENTER PANEL Cab Wiring for TMC RP1226 Vehicle Accessory Connector; Includes 14-pin Connector with Switched Power, Battery Power, Ignition Power, Ground & Body 250K Datalink, Connector Located Behind Instrument Panel Center Console
8XNG	STARTING MOTOR {Mitsubishi Electric Automotive America DP60} 12-Volt
8XPA	HEADLIGHTS LED, with Daytime Running Lights, Automatic Twilight Controlled
8XPK	POWER SOURCE, ADDITIONAL Auxiliary Power Outlet (APO) with USB-A Port and USB-C Port, Located in the Instrument Panel
9505	QUARTER FENDERS for Rear Wheels, Mirror-Finished Stainless Steel, Frame Mounted

<u>Code</u>	<u>Description</u>
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HCY	GRILLE Molded in Black, with Chrome Surround
9WAY	FRONT END Tilting, Fiberglass, with Three Piece Construction
	<u>Includes</u> : BUG SCREEN Front End; Mounted Behind Grille : HOOD TILT ASSIST Includes Torsion Bar Spring System
9WBN	FENDER EXTENSIONS Painted
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "HX"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10AEU	CONNECTED PLATFORM (LT/RH) Includes Connectivity Module and Five Year Data Plan
10HHT	FIFTH WHEEL, AIR SLIDE {Fontaine SL6LWB725024} 24" Slide, 7.25" Above Top of Frame, Left Hand Release
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.
	<u>Notes</u> : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.
10WCY	SAFETY TRIANGLES
10WPT	MUD FLAP HOLDER Spring Loaded, Painted Black, 45-Degree End, with Red and White Reflective Tape, Less Flaps
10WPY	MUD FLAPS, REAR Black Rubber, Anti-Sail, Less Holders
11MHT	CLUTCH {International 430MM} Maintenance Free, Self-Adjusting, 17" (430 mm) Dia Single Plate, Diaphragm Spring, Organic, 5-Spring, Coaxial, 285mm Damper with Pre-Damper, 2"-24 Tooth Spline, Hydraulic-Electric Actuation Pull Type Control, 1850 lb-ft (2508 Nm) Torque Capacity
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12BGU	ENGINE, DIESEL {International S13} EPA 2024, 430HP @ 1800 RPM, 1550 lb-ft Torque @ 900 RPM, 2000 RPM Governed Speed, 430 Peak HP (Max)
12TAB	POWERTRAIN INTERFACE MODULE
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed
12VBZ	AIR CLEANER Dual Element, Engine Mounted
	<u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted
12VKJ	EMISSION, CALENDAR YEAR {International S13} EPA, OBD and GHG Certified for Calendar Year 2026
12WBR	FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)
12WCX	HOSE CLAMPS, RADIATOR HOSES {Gates} Shrink Band Type
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood

<u>Code</u>	<u>Description</u>
12WYZ	RADIATOR DRAIN & FILL FITTING SPECIAL; To Vacuum Out or Fill the Cooling System from the Bottom of Radiator, for Use with Quick-Connect Radiator Drain Tool or Shop Coolant Evacuation-Fill System
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations
12XBE	CRUISE CONTROL Predictive, Includes GPS Enhanced Cruise Control; Includes Module, Antenna and Wiring
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty
12XCV	RADIATOR Aluminum, Welded, Down Flow, Front to Back System, 1325 SqIn, with 973 SqIn Charge Air Cooler
13HAB	TRANSMISSION, MANUAL {International T14 1550 lb-ft DD} 14-Speed Fully Automated Manual, Direct Drive Optimized, Aluminum Clutch Housing, Pneumatic Shift Control, Electronic Clutch Actuation, Internal Lube Oil Pump, Hill Start Aid
13HAP	PTO, TRANSMISSION Omit, Includes PTO Prep Harness to Transmission, for T14 Transmission
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission
13WMC	DRIVE MODE Allows Driver to Select Drive Mode (Economy & Performance), Includes Switch, for T14 Transmission
13WMD	DOWNHILL SPEED ASSIST Maintains Vehicle Speed While Descending Hill, Includes ON/OFF Switch and Speed Control Switch
13WME	MANEUVERING MODE Maintains Low Speed Throttle Control to Reduce Harsh Driveline Engagement/ Disengagement, Enables Slow & Steady Trailer Hook up, Docking & Tight Space Driving, Includes Switch, for T14 Transmission
13WMM	TRANSMISSION OIL {SAE 75W80} Synthetic; 22 thru 33.99 Pints
14862	PDL WARNING BUZZER Power Divider Lock
14899	SUSPENSION AIR CONTROL VALVE Pressure Release Control In Cab
14GVE	AXLE, REAR, TANDEM {Meritor MT-40-14X-4CFR} Single Reduction, Amboid Gearing in Rear-Rear Axle, 40,000-lb Capacity, .433"(11mm) Wall Housing Thickness, R Wheel Ends . Gear Ratio: 2.47
	<u>Includes</u> : POWER DIVIDER LOCK Electric over Air Operated, Cab Control with Indicator Light
	<u>Notes</u> : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance
14UPZ	SUSPENSION, REAR, AIR, TANDEM {International} Ride Optimized Suspension (IROS), 40,000-lb Capacity, 52" Axle Spacing, 9.25" Ride Height, with Shock Absorbers
14WMJ	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 50 thru 64.99 Pints
15LNZ	FUEL HEATER PLUMBING Plumbing for Blender Valve Integrated in Fuel Water Separator, Thermostatically Controlled, for S13 Engine
15LRT	FUEL/WATER SEPARATOR {Racor 6600} 12 VDC Electric Heater, Includes Pre-Heater, with Sight Bowl, Includes Water-In-Fuel Sensor
15SYD	FUEL TANK Top Draw, Non-Polished Aluminum, 26" Dia, 100 US Gal (379L), Mounted Right Side, Back of Cab/Under Sleeper
15WDM	DEF TANK 10.6 US Gal (40L) Capacity, Frame Mounted Outside Left Rail, Back of Cab/Under Sleeper
16030	CAB Conventional, Day Cab
	<u>Includes</u> : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window

<u>Code</u>	<u>Description</u>
	: CONSOLE, CENTER Includes Two Cup Holders and One Additional Storage Area
	: COURTESY LIGHT (2) Driver and Passenger Door Mounted
	: DOME LIGHT, CAB Rectangular, Door and Instrument Panel Mounted Switch Activated, Timed Theater Dimming, Center Mounted, Integral to Console
	: FLOOR COVERING Rubber, Black
	: GLASS, ALL WINDOWS Tinted
	: GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side
	: GRAB HANDLE, CAB INTERIOR (4) "B" Pillar and Door Mounted, Two Each Side
	: INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color
	: READING LIGHT, CAB Located in Overhead Console
	: STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door
16564	HEATER SHUT-OFF VALVES (1) Ball Valve Type, Supply Line
16BAM	AIR CONDITIONER with Integral Heater and Defroster
	<u>Includes</u>
	: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer
	<u>Includes</u>
	: GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for
	: GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure
	: WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)
16HCS	GAUGE, TEMPERATURE, AMBIENT Sensor Wiring with Display Unit Mounted in Cluster
16HGG	GAUGE, OIL TEMP, ENGINE
16HGN	GAUGE, AIR APPLICATION
16HKC	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Under Hood Cleaner Mounted with Internal Switch, with Text Message in Cluster
16HKE	GAUGE, LOAD INDICATING REAR Text Message in Cluster Display, for use with Rear Air Suspension
16KBN	SEAT, DRIVER {National 2000 Model 295} Air Suspension, Intermediate Back, All Vinyl, 2 Arm Rests, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Back Angle Adjust
16REP	SEAT, PASSENGER {National 2000} Non Suspension, Intermediate Back, All Vinyl, 11 Degree Back Angle
16SNS	MIRRORS (2) Aero Pedestal, Power Adjust, Heated, Black Heads and Arms, 6.5" x 14" Flat Glass, Includes 6.5" x 6" Convex Mirrors, for 102" Load Width
	<u>Notes</u>
	: Mirror Dimensions are Rounded to the Nearest 0.5"
16SSB	MIRROR, CONVEX, HOOD MOUNTED (2) Right and Left Sides, Breakaway, Black
16UZJ	STORAGE, REAR WALL Storage Pocket, Located on Back Wall Between Driver and Passenger Seats
16VKB	CAB INTERIOR TRIM Classic, for Day Cab
	<u>Includes</u>
	: DOOR TRIM, INTERIOR Black Handle
	: INSTRUMENT PANEL TRIM Black, Black Gauges with Black Bezels
	: SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16VLV	MONITOR, TIRE PRESSURE Omit

<u>Code</u>	<u>Description</u>
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature
16WSE	LOW WASHER FLUID INDICATOR
16XCM	CAB DOOR LOCKS Power, Driver Side Only; Non-Locking When Door Open
16XCU	TELEMATICS BRACKET with Universal Mount, 1" Ball Mount Size, for Customer Supplied Telematics Device, Mounted to Side Wing Panel
16XJP	INSTRUMENT PANEL Wing Panel
16XJW	CAB INTERIOR TRIM BACK PANEL Vinyl, for Day Cab
16XTM	ACCESS, CAB Aluminum, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab or Sleeper Cab
16XWV	SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color, with Integral LED Clearance/Marker Lights
16XYM	AERODYNAMIC PACKAGE Includes Roof Air Deflector, Cab Side Extenders; for Day Cab, Paint and Install at the Plant
27DWR	WHEELS, FRONT {Accuride 43644} DISC; 22.5x8.25 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DWR	WHEELS, REAR {Accuride 43644} DUAL DISC; 22.5x8.25 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
29CAG	WHEEL COVER, REAR Aerodynamic, 22.5", Black
35864	PAINT FENDER EXTENSIONS Single Color; Same as Number One Cab Schematic Color
7702495451	(8) TIRE, REAR 295/75R22.5 Load Range G HDL3 LTL (CONTINENTAL), 512 rev/mile, 75 MPH, Drive
7762495443	(2) TIRE, FRONT 295/75R22.5 Load Range H ECOPLUS HS3+ (CONTINENTAL), 519 rev/mile, 75 MPH, All-Position
810000	FIFTH WHEEL LOCATION On Rear Axle Centerline

Services Section:

40125	WARRANTY Standard for LT/RH Series, Effective with Vehicles Built January 2, 2016 or Later, CTS-2010A
-------	---

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Total Factory List Price Including Options:		\$129,595.00
Total Freight:		\$3,100.00
Total Factory List Price Including Freight:		\$132,695.00
Total Vehicle Price:		\$132,695.00
Total Sale Price:		\$132,695.00
Total Per Vehicle Sales Price:		\$132,695.00
Net Sales Price:		\$132,695.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

International Motors, LLC d/b/a International Motors USA LLC in Illinois and Ohio.