

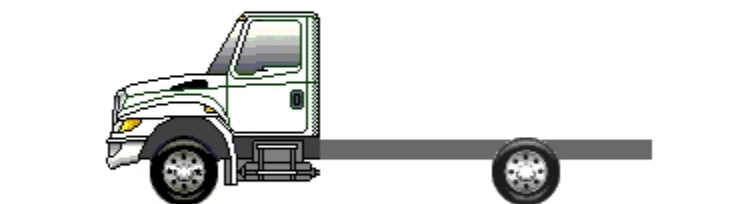
Prepared For:

HOUSTON-GALVESTON AREA C
 Neal Witty
 3555 TIMMONS
 HOUSTON,, TX 77227-2777
 (713)627 - 3200
 Reference ID: N/A

Presented By:

HOLT TRK CTRS OF TX, LLC
 Carlos Weeber
 8900 NORTH LOOP E
 HOUSTON TX 77029 - 1218
 (713)674-3444

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

**Model Profile****2027 MV607 SBA LP (MV60H)**

AXLE CONFIG:	4X2
APPLICATION:	Stake Flat
MISSION:	Requested GVWR: 25999. Calc. GVWR: 23500. Calc. GCWR: 37500 Calc. Start / Grade Ability: 17.81% / 2.31% @ 55 MPH Calc. Geared Speed: 81.6 MPH
DIMENSION:	Wheelbase: 169.00, CA: 101.90, Axle to Frame: 63.00
ENGINE, DIESEL:	{Cummins B6.7 200} EPA 2024, 200HP @ 2400 RPM, 600 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 200 Peak HP (Max)
TRANSMISSION, MANUAL:	{Fuller FSO-8406A} 6-Speed Manual, Aluminum Clutch Housing, Overdrive, Fully Synchronized, Short Shift Stroke
CLUTCH:	{Eaton Fuller Solo 1402} Self-Adjusting, 14" Dia Two-Plate, Stamped Angle Spring, Ceramic, 3- Super Button, 7+1 Low Rate Damper, 1.75"-10 Tooth Spline, Mechanical Pull Type Control, 860 lb-ft Torque Capacity
AXLE, FRONT NON-DRIVING:	{Meritor MFS-08-153B} I-Beam Type, 8,000-lb Capacity
AXLE, REAR, SINGLE:	{Dana Spicer S16-130} Single Reduction, 15,500-lb Capacity, 190 Wheel Ends Gear Ratio: 3.91
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 245/70R19.5 Load Range H R02 PROFUEL STEER (PIRELLI), 627 rev/mile, 81 MPH, All- Position
TIRE, REAR:	(4) 245/70R19.5 Load Range H R02 PROFUEL STEER (PIRELLI), 627 rev/mile, 81 MPH, All- Position
SUSPENSION, REAR, SINGLE:	15,500-lb Capacity, Vari-Rate Springs
PAINT:	Cab schematic 100WP Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
MV60H00	Base Chassis, Model MV607 SBA LP with 169.00 Wheelbase, 101.90 CA, and 63.00 Axle to Frame.
1ANA	AXLE CONFIGURATION 4x2
	<u>Notes</u> : Pricing may change if axle configuration is changed.
1CAA	FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield); 9.125" x 3.062" x 0.312" (231.8mm x 77.8mm x 8.0mm); with Transition to 6.500" x 3.062" x 0.312" (165.1mm x 77.8mm x 8.0mm); 388.4" (9864mm) Maximum OAL, For LP Chassis
1LNG	BUMPER, FRONT Contoured, Steel, Painted Gloss Black
1WEH	WHEELBASE RANGE 134" (340cm) Through and Including 197" (500cm)
2ATK	AXLE, FRONT NON-DRIVING {Meritor MFS-08-153B} I-Beam Type, 8,000-lb Capacity
3ADA	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 8,000-lb Capacity, with Shock Absorbers
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free
	<u>Notes</u> : In combinations where chassis component weights may cause a chassis lean, a spring is used in front left spring pack to offset this imbalance & provide a level chassis, within 3/8", with body installed.
4100	BRAKE SYSTEM, HYDRAULIC {Wabco} Split System, with Automatic Adjustment and Four Channel ABS
4GAR	BRAKE, PARKING {Bosch} DSSA Type, 12" x 3"; for Hydraulic Brake Chassis; Activated by Lever in Cab; Differential Mounted
4XCW	BRAKES, FRONT {Meritor Quadraulic} Hydraulic Disc Type, with Four 70mm Diameter Pistons, 12,000-lb Capacity
4XCX	BRAKES, REAR {Meritor Quadraulic} Hydraulic Disc Type, with Four 70mm Diameter Pistons, 21,000-lb Capacity per Axle
5AAA	STEERING COLUMN Stationary
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PRG	STEERING GEAR {TRW TAS40} Power
6DGA	DRIVELINE SYSTEM {Dana Spicer} SPL100, for 4x2/6x2
7BME	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Under Right Rail Back of Cab, Includes Single Short Horizontal Tail Pipe
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u> : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted

<u>Code</u>	<u>Description</u>
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8GXD	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense
8MJP	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (2) 12-Volt 1320CCA Total, Top Threaded Stud
8RMS	SPEAKERS Omit
8RMX	RADIO Omit, Includes Wiring and Antenna
8RPP	ANTENNA Shark Fin, Roof Mounted
8VBE	HORN, ELECTRIC (1) Trumpet Style
8VUX	BATTERY BOX Steel, with Plastic Cover, 25" Wide, 2-3 Battery Capacity, Mounted Right Side Under Cab
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XKL	STARTING MOTOR {Mitsubishi Electric Automotive America 90P47} 12-Volt, with Soft-Start
8XNY	HEADLIGHTS Halogen
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HCW	GRILLE Molded in Black
9WBN	FENDER EXTENSIONS Painted
9WBW	FRONT END Tilting, Fiberglass, with Three Piece Construction, Dual Air Intakes
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WP"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10AGB	CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.
	<u>Notes</u> : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.
11LGB	CLUTCH {Eaton Fuller Solo 1402} Self-Adjusting, 14" Dia Two-Plate, Stamped Angle Spring, Ceramic, 3-Super Button, 7+1 Low Rate Damper, 1.75"-10 Tooth Spline, Mechanical Pull Type Control, 860 lb-ft Torque Capacity
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12EXR	ENGINE, DIESEL {Cummins B6.7 200} EPA 2024, 200HP @ 2400 RPM, 600 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 200 Peak HP (Max)
12TSY	FAN DRIVE {Borg-Warner SA85} Viscous Type, Screw On
	<u>Includes</u> : FAN Nylon
12VCE	AIR CLEANER Single Element, Fire Retardant Media
12VKM	EMISSION, CALENDAR YEAR {Cummins B6.7} EPA, OBD and GHG Certified for Calendar Year 2026

Code	Description
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYP	ENGINE CONTROL, REMOTE MOUNTED No Provision for Remote Mounted Engine Control
12WPV	OIL PAN 15 Quart Capacity, For Cummins ISB/B6.7 Engines
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations
12XCB	RADIATOR Aluminum, 2-Row, Down Flow, Front to Back System, 640 SqIn Louvered, with 383 SqIn Charge Air Cooler
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty
13GMJ	TRANSMISSION, MANUAL {Fuller FSO-8406A} 6-Speed Manual, Aluminum Clutch Housing, Overdrive, Fully Synchronized, Short Shift Stroke
13WLW	TRANSMISSION OIL {EmGard 40W} Synthetic; 1 thru 21.99 Pints
13XAL	PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission
14AJE	AXLE, REAR, SINGLE {Dana Spicer S16-130} Single Reduction, 15,500-lb Capacity, 190 Wheel Ends . Gear Ratio: 3.91
14SAE	SUSPENSION, REAR, SINGLE 15,500-lb Capacity, Vari-Rate Springs
15LMR	FUEL/WATER SEPARATOR {Racor 400 Series,} with Primer Pump, Includes Water-in-Fuel Sensor
15LRE	LOCATION FUEL/WATER SEPARATOR Mounted Under Hood, Left Side, Above Front Axle
15SWU	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 40 US Gal (151L), Mounted Left Side, Under Cab
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
	<u>Includes</u> : CLEARANCE/MARKER LIGHTS (5) Flush Mounted
16400	SEAT, PASSENGER Omit Item
16BAM	AIR CONDITIONER with Integral Heater and Defroster
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer
	<u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure or Auxiliary Air Pressure (if Air Equipped) : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure, Primary and Secondary (if Air Equipped)
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16KAV	SEAT, DRIVER {National} Non-Suspension, High Back with Integral Head Rest, Vinyl, with Fixed Back
16SNL	MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"

<u>Code</u>	<u>Description</u>
16VKB	CAB INTERIOR TRIM Classic, for Day Cab <u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16VLM	CAB REAR SUSPENSION Rubber Suspension, for Low Cab Height
16XCK	WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors
16XJN	INSTRUMENT PANEL Flat Panel
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab
27DTX	WHEELS, FRONT {Accuride 50180} DISC; 19.5x6.75 Rims, Powder Coat Steel, 4-Hand Hole, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DTX	WHEELS, REAR {Accuride 50180} DUAL DISC; 19.5x6.75 Rims, Powder Coat Steel, 4-Hand Hole, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
7789455510	(2) TIRE, FRONT 245/70R19.5 Load Range H R02 PROFUEL STEER (PIRELLI), 627 rev/mile, 81 MPH, All-Position
7789455510	(4) TIRE, REAR 245/70R19.5 Load Range H R02 PROFUEL STEER (PIRELLI), 627 rev/mile, 81 MPH, All-Position

Services Section:

40129	WARRANTY Standard for MV Series, Effective with Vehicles Built July 1, 2017 or Later, CTS-2020A
-------	---

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Factory List Prices:		
Product Items	\$74,700.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$74,700.00
Freight	\$3,100.00	
Total Freight:		\$3,100.00
Total Factory List Price Including Freight:		\$77,800.00
Total Vehicle Price:		\$77,800.00
Total Sale Price:		\$77,800.00
Total Per Vehicle Sales Price:		\$77,800.00
Net Sales Price:		\$77,800.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

If you haven't added a planned maintenance service contract to your proposal yet, please get in touch with your local dealer, International or IC Bus Sales Representative to learn more about the benefits when ordering together with the vehicle.

International® Financial offers loans, a full line up of lease options, and can establish a line of credit for use towards the purchase of International and IC Bus vehicles. Ask your dealer, International® or IC Bus® Sales Representative about completing an International Financial credit application and any promotional offers that may be available. International Financial services are provided by Navistar Financial Corporation.

The TOPS FET Calculation is an estimate for reference purposes only. The seller is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described here in are International Motors, LLC* standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

International Motors, LLC d/b/a International Motors USA LLC in Illinois and Ohio.