




Product Specifications

Load Capacity	Trailer Weight	Overall Length	Deck Width	Deck Length
110,000 lbs.	20,500 lbs.	51'0"	8'6"	24'0"

Frame Construction	Pierced main beam construction with one piece, interlocking crossmembers	Decking	1-3/4" Apitong covered outside, center open
	True (4) beam construction with positive camber and tapered frame design	Outriggers	11 per side
	<u>Mainbeams:</u> 16" Fabricated I-Beams	Tie Downs	(16) eight per side
	<u>Crossmembers:</u> 8" I-Beams x 13 lbs.per ft., 60,000 lb. psi. on 20" Centers	Lights & Wiring	Rubber mounted LED lights and sealed wiring harness
Gooseneck	Hydraulic removable, non-ground bearing (5) position ride hgt., (2) 8" lift cylinders	Boom Well	"V" crossmembers with steel grating in bottom
Hydraulic operation	Wetline	Suspension	Air ride with auto and manual controls
Fifth Wheel Height	48"-52" adjustable	Axles	25,000 lb. capacity, 77.5" track
King Pin Plate	5/16"	Tires	255/70R22.5 (H) low profile radials
King Pin	18" setting, 90" swing clearance	Wheels	8.25 x 22.5 steel disc, hub piloted
		Brakes	16-1/2" x 7" with air activated outboard drums Automatic slack adjusters Anti-lock brake system and spring parking brakes
		Paint	Black urethane Rust prohibitive undercoating Available: Black, White, Red, Yellow, or Gray

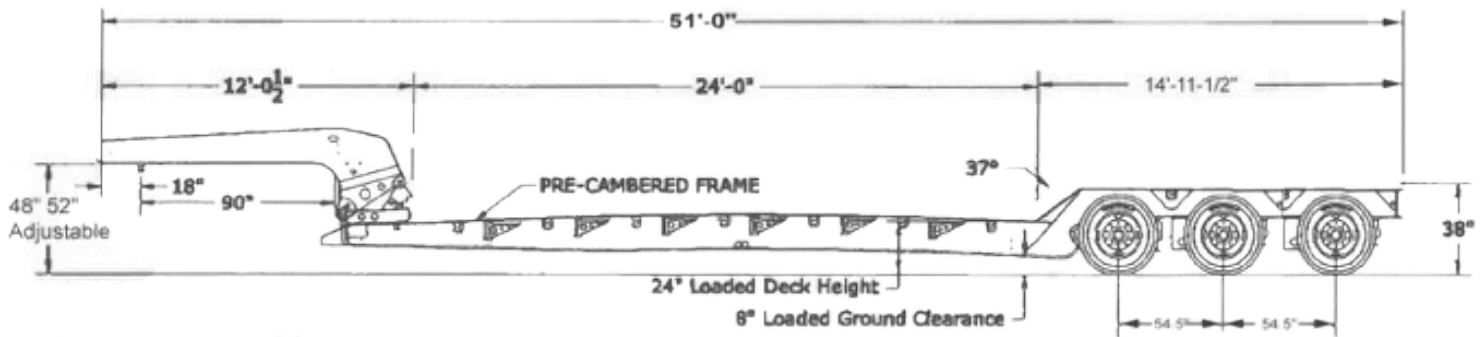

Options

- Paint color
- Spare tire/carrier
- Air ride suspension
- Outriggers
- Tire upgrade
- Air lift axles
- Additional D-rings
- Hubodometer