


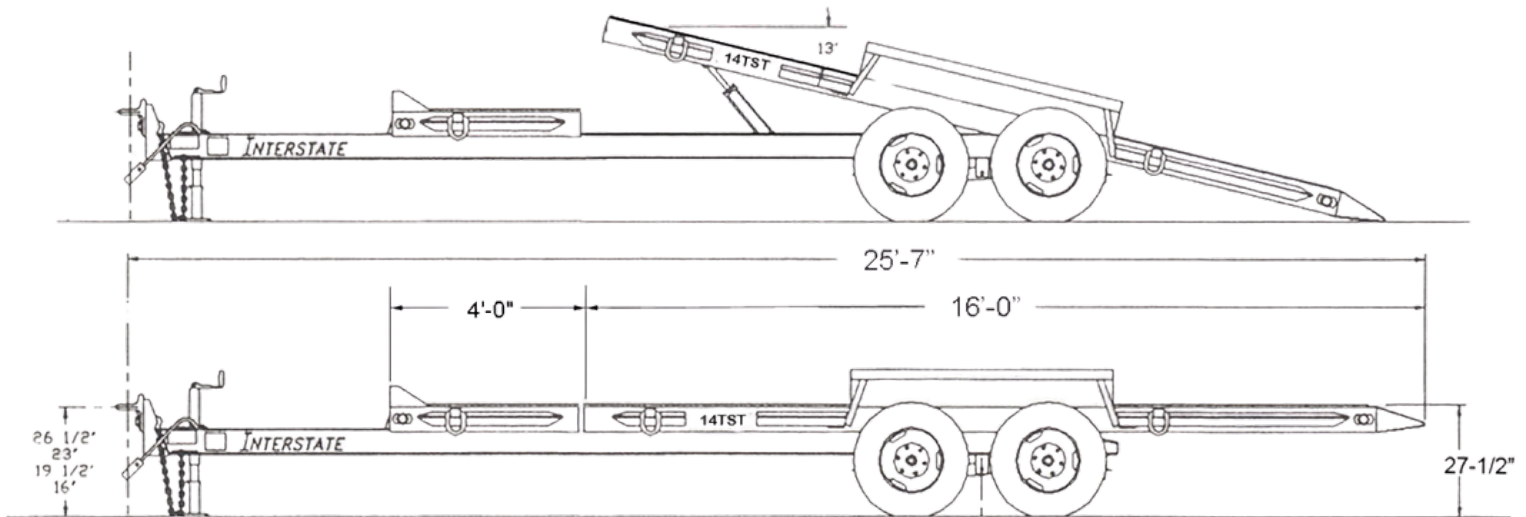

## Product Specifications

| Load Capacity | Trailer Weight | Overall Length | Overall Width | Deck Width          | Deck Length                           |
|---------------|----------------|----------------|---------------|---------------------|---------------------------------------|
| 14,000 lbs.   | 4,800 lbs      | 25'7"          | 8'6"          | 80" between fenders | 16'0" tilt deck<br>4' stationary deck |

|                           |                                                                                                                                                                                                                                                                   |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frame Construction</b> | <p>Pierced mainbeam construction with one piece interlocking crossmembers</p> <p><u>Mainbeams:</u> W6" x 16 lbs. per ft.</p> <p><u>Crossmembers:</u> SLB 4" x 3.2 lbs per ft. grade A36, 50,000 lb + yield, 18"</p> <p><u>Bed frame:</u> C6" 8.2 lbs. per ft.</p> |
| <b>Decking</b>            | 2" nominal oak                                                                                                                                                                                                                                                    |
| <b>Tie Downs</b>          | (6) heavy duty D-rings, 3 per side                                                                                                                                                                                                                                |
| <b>Suspension</b>         | Multi-point spring with equalizers                                                                                                                                                                                                                                |

|               |                                                                                                  |
|---------------|--------------------------------------------------------------------------------------------------|
| <b>Axles</b>  | (2) 7,000 lb capacity                                                                            |
| <b>Brakes</b> | 12" x 2" electric with integral break-away system                                                |
| <b>Tires</b>  | 215/75R17.5                                                                                      |
| <b>Wheels</b> | 8 hole steel disc                                                                                |
| <b>Jack</b>   | 12,000 lbs. top crank                                                                            |
| <b>Hitch</b>  | 4 position cast steel pintle eye, 1-5/8" stock, 3" I.D.                                          |
| <b>Lights</b> | Flush mounted LED in rubber grommets<br>Modular wiring harness with 7-way plug                   |
| <b>Paint</b>  | Black urethane<br>Rust prohibitive undercoating<br>Available: Black, White, Red, Yellow, or Gray |



## Options

- Additional deck lengths
- Gooseneck
- Paint color matching or galvanizing
- Tire upgrade
- Spare tire/carrier
- Polished aluminum wheels
- Dual 2-speed jacks
- Hydraulic jacks
- Toolbox lid or enclosure
- Additional D-rings
- Apitong decking
- Bucket plate/well
- Hubodometer