


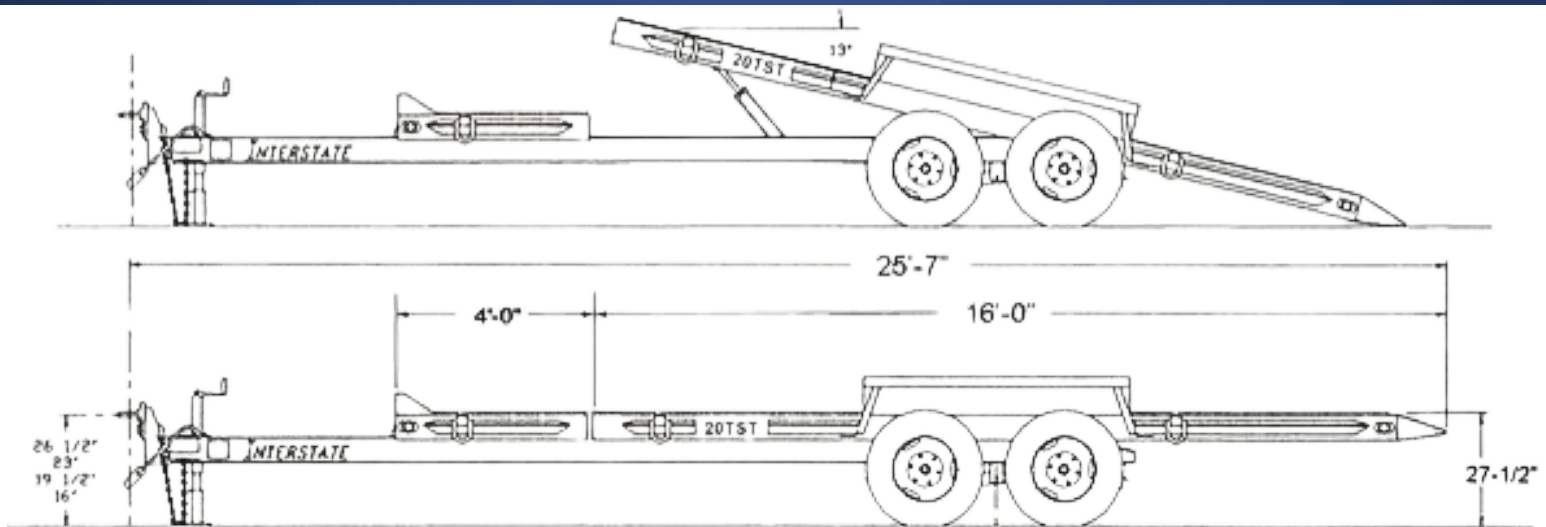

Product Specifications

Load Capacity	Trailer Weight	Overall Length	Overall Width	Deck Width	Deck Length
20,000 lbs.	4,800 lbs	25'7"	8'6"	80" between fenders	16'0" tilt deck 4' stationary deck

Frame Construction	Pierced mainbeam construction with one piece interlocking crossmembers <u>Mainbeams:</u> W6" x 16 lbs. per ft. <u>Crossmembers:</u> SLB 4" x 3.2 lbs per ft. grade A36, 50,000 lb + yield, 18" <u>Bed frame:</u> C6" 8.2 lbs. per ft.
Decking	2" nominal oak
Tie Downs	(6) heavy duty D-rings, 3 per side
Suspension	Multi-point spring with equalizers

Axles	(2) 10,000lb lb capacity
Brakes	12" x 3 3/8" electric with integral break away system
Tires	235/75R17.5 (J)
Wheels	8 hole steel disc
Jack	12,000 lbs. top crank
Hitch	4 position cast steel pintle eye, 1-5/8" stock, 3" I.D.
Lights	Flush mounted LED in rubber grommets Modular wiring harness with 7-way plug
Paint	Black urethane Rust prohibitive undercoating Available: Black, White, Red, Yellow, or Gray



Options

- Additional deck lengths
- Gooseneck
- Paint color matching or galvanizing
- Tire upgrade
- Spare tire/carrier
- Polished aluminum wheels
- Dual 2-speed jacks
- Hydraulic jacks
- Toolbox lid or enclosure
- Additional D-rings
- Apitong decking
- Bucket plate/well
- Hubodometer