


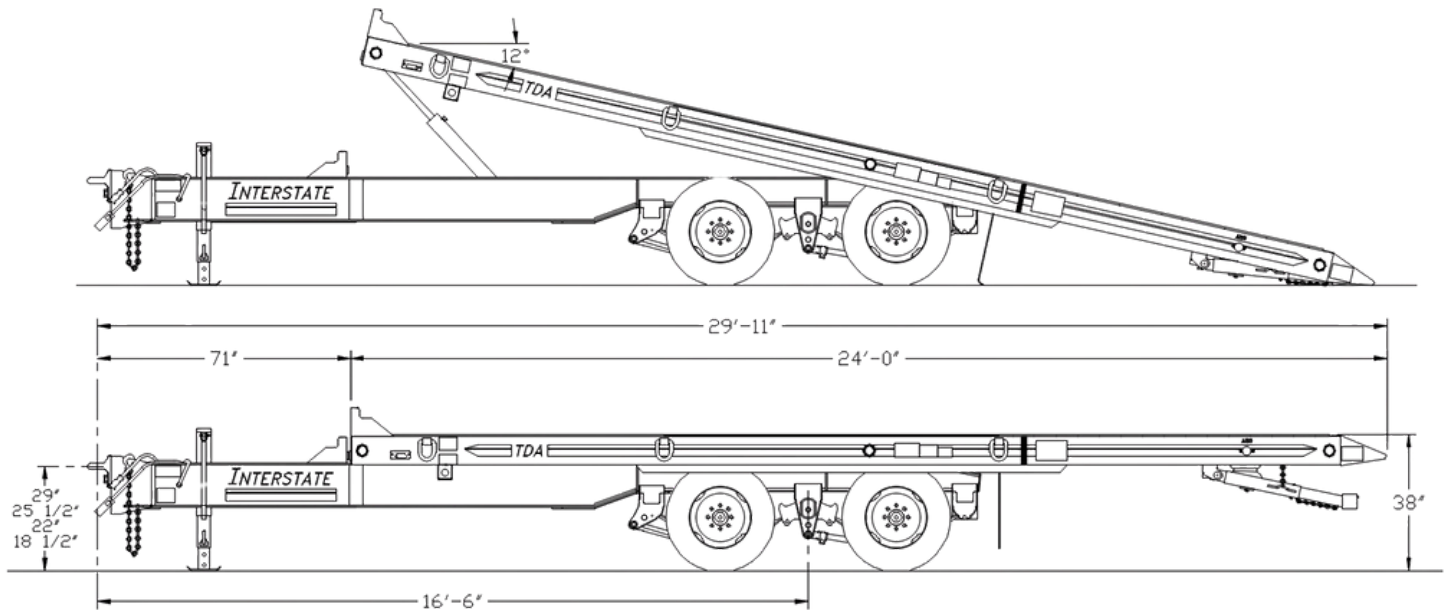

Product Specifications

Load Capacity	Trailer Weight	Overall Length	Deck Width	Deck Length
24,000 lbs.	7,300 lbs.	29'11"	8'6"	24'0" tilt deck

Frame Construction	Pierced mainbeam construction with one piece interlocking crossmembers <u>Mainbeams:</u> (2)W12" x 19 lbs. per ft grade 50 Hi-tensile <u>Main beams tilt platform:</u> (2) W8" x 15lbs. per ft., grade 50 Hi-tensile <u>Crossmembers:</u> S6" I-beam x 12.5 lbs per ft., grade 50 Hi-tensile on 22" centers <u>Siderails:</u> C8" x 13.75 lbs per ft grade 50 Hi-tensile
Underride guard	Meets "National Highway Traffic Safety Administration" mandates FMVSS-223 & FMVSS-224
Decking	2" nominal oak
Headboard	8"x3" rectangular tube, full width of trailer
Tie Downs	(8) heavy duty D-rings, 4 per side

Axles	(2) 12,000 lbs. capacity with oil bath hubs
Brakes	12 1/4" x 5" air with "Wabco" anti-lock braking system and spring parking brakes
Tires	(8) 235/80R16 (E)
Wheels	8 hole steel disc
Jack	12,000 lb dropleg sidecrank
Hitch	4 position cast steel pintle eye 1-5/8" stock, 2 7/8" I.D.
Lights	Flush mounted LED in rubber grommets Modular wiring harness with 7-way plug
Paint	Black urethane Rust prohibitive undercoating Available: Black, White, Red, Yellow, or Gray
Suspension	Multi point spring with equalizers



Options

- Additional deck lengths
- Gooseneck
- Paint color matching or galvanizing
- Tire upgrade
- Spare tire/carrier
- Polished aluminum wheels
- Dual 2-speed jacks
- Hydraulic jacks
- Toolbox lid or enclosure
- Additional D-rings
- Apitong decking
- Bucket plate/well
- Hubodometer