


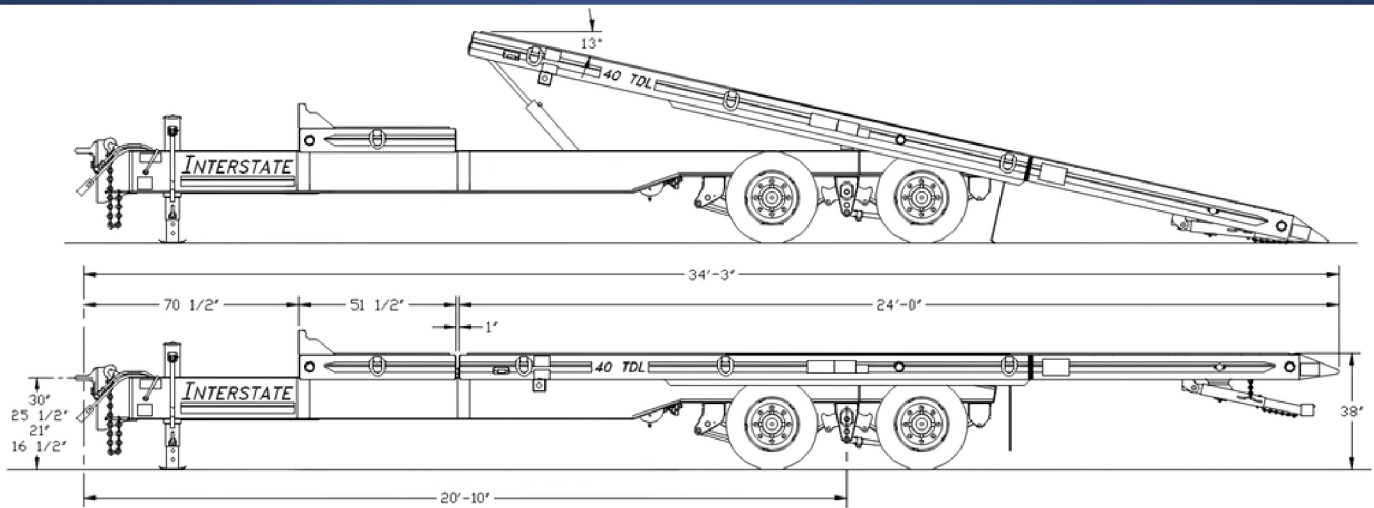

## Product Specifications

| Load Capacity | Trailer Weight | Overall Length | Deck Width | Deck Length                                     |
|---------------|----------------|----------------|------------|-------------------------------------------------|
| 40,000 lbs.   | 9,400 lbs.     | 34'3"          | 8'6"       | 24'0" tilting platform<br>51.5" stationary deck |

|                           |                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frame Construction</b> | <p>Pierced main beam construction with one piece interlocking crossmembers</p> <p><u>Main beam chasis:</u> (2) W14" x 26 lbs. per ft., grade 50 Hi-tensile</p> <p><u>Main beam tilt platform:</u> (2) W8 x 15 lbs.per ft., grade 50 Hi-tensile</p> <p>Crossmembers tilt platform: S6" I-beam x 12.5 lbs per ft., grade 50 Hi-tensile strength on 22" centers</p> |
| <b>Siderails</b>          | C8" x 13.75 lbs. per ft., grade 50 Hi-tensile                                                                                                                                                                                                                                                                                                                    |
| <b>Decking</b>            | 2" nominal oak                                                                                                                                                                                                                                                                                                                                                   |
| <b>Headboard</b>          | 8" x 3" rectangular tube, full width of trailer                                                                                                                                                                                                                                                                                                                  |
| <b>Tie Downs</b>          | (8) heavy duty D-rings, 4 per side                                                                                                                                                                                                                                                                                                                               |

|                        |                                                                                                  |
|------------------------|--------------------------------------------------------------------------------------------------|
| <b>Underride guard</b> | Meets "National Highway Traffic Safety Administration" mandates FMCSS-223 & FMVSS-224            |
| <b>Suspension</b>      | Hutch 9700 multi-point spring with radius rod axle tracking adjustment, 44,000 lb. capacity.     |
| <b>Axles</b>           | (2) 25,000 lb. capacity with oil bath hubs                                                       |
| <b>Brakes</b>          | 12-1/4" x 7-1/2" air with "Wabco" anti-lock braking system and spring parking brake              |
| <b>Tires</b>           | (8) 215/75R17.5 (H)                                                                              |
| <b>Wheels</b>          | 8 hole, hub piloted                                                                              |
| <b>Jack</b>            | 25,000 lbs., 2 speed landing leg                                                                 |
| <b>Hitch</b>           | 4 position cast steel pintle eye, 1-5/8" stock, 3" I.D.                                          |
| <b>Lights</b>          | Flush mounted LED in rubber grommets<br>Modular wiring harness with 7-way plug                   |
| <b>Paint</b>           | Black urethane<br>Rust prohibitive undercoating<br>Available: Black, White, Red, Yellow, or Gray |



## Options

- Additional deck lengths
- Gooseneck
- Paint color matching or galvanizing
- Tire upgrade
- Spare tire/carrier
- Polished aluminum wheels
- Dual 2-speed jacks
- Hydraulic jacks
- Toolbox lid or enclosure
- Air lift axles
- Additional D-rings
- Apitong decking
- Bucket plate/well
- Hubodometer
- Air ride suspension