


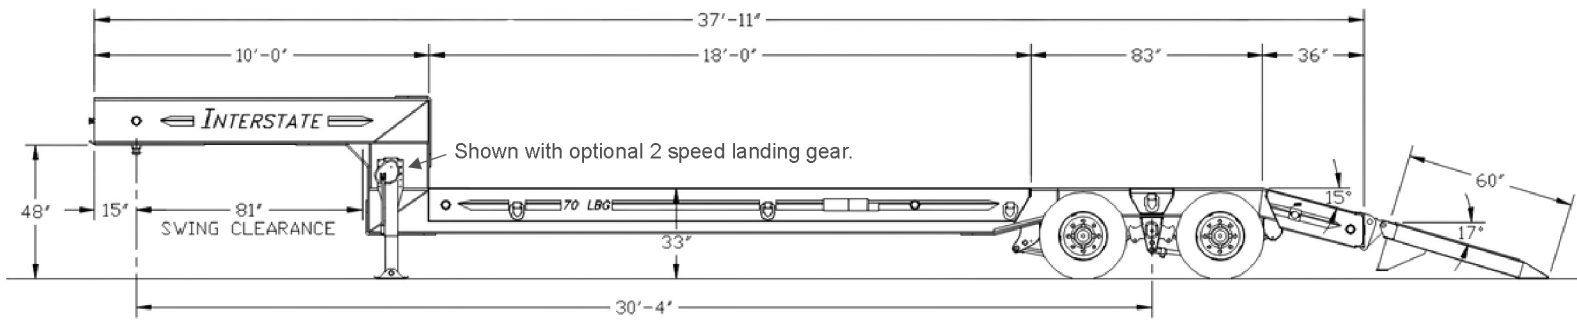

Product Specifications

Load Capacity	Trailer Weight	Overall Length	Deck Width	Deck Length
70,000 lbs.	12,000 lbs.	38'2"	8'6"	18'0" (from gooseneck riser to 1st wheel well)

Frame Construction	Pierced mainbeam construction with one piece interlocking crossmembers <u>Mainbeams:</u> W16" x 31 lbs. per ft., grade 50 Hi-tensile <u>Crossmembers:</u> W10" I-beam x 12 lbs per ft., grade 50 Hi-tensile on 30" centers <u>Siderails:</u> C12" x 20.7 lbs. per ft., grade 50 Hi-tensile
Ramps	60" x 22" wood-filled with spring assist
Decking	2" nominal oak
Tie Downs	(8) heavy duty D-rings, 4 per side

Suspension	Hutch 9,700 multi-point spring with radius rod axle tracking adjustment, 44,000 lb. capacity
Axles	(2) 25,000 lb. capacity with oil bath hubs
Brakes	12- 1/4" x 7-1/2" air with "Wabco" anti-lock braking system and spring parking brakes
Tires	(8) 235/75R17.5 (H)
Wheels	8 hole, hub piloted steel disc
Landing Gear	4 position, tubular pin drop legs with sand shoes
Hitch	2" SAE king pin
Lights	Flush mounted LED in rubber grommets Modular wiring harness with 7-way plug
Paint	Black urethane Rust prohibitive undercoating Available: Black, White, Red, Yellow, or Gray



Options

- Ramps (air, hydraulic, bi-fold, traction)
- Additional deck lengths
- Full width gooseneck
- Paint color matching or galvanizing
- Polished aluminum wheels
- Toolbox lid or enclosure
- Outriggers
- Tire upgrade
- Additional D-rings
- Apitong decking
- Bucket plate/well
- Hubodometer
- Spare tire/carrier