



## **KB-20 SERIES**

***BUILT WITH PRIDE IN THE USA***

The KB-20 is well-known for its quality, economic efficiency, durability, and user-friendly design. With a variety of options for boom length and trailer capacity, this series is ideal for all types of loading applications. This unit can be tailored to fit your specific needs. **DO IT RIGHT with Pac-Mac!**

Sourcewell 

Awarded Contract

Contract # 040621-HMC

**HGACBuy™**  
THE SMART PURCHASING SOLUTION



**E-PAC-MAC.COM**

Manufactured by Hol-Mac Corporation  
P.O. Box 349 • Bay Springs, MS 39422 • 601-764-4121



# KB-20 SERIES

## TECHNICAL DATA AND SPECIFICATIONS

### GENERAL SPECIFICATIONS

Height of boom to ground in lowest travel position (based on 37 in. chassis height)	11 ft.
Boom length	20 ft. (16 ft. with 4 ft. extension)
Optional boom lengths	16 / 17 / 18 ft. (fixed)
Boom rotation	270° non-continuous
Lifting capacity at 20 ft. (with bucket)	3,300 lbs. (standard) 4,500 lbs. (optional)
H-style outriggers	
Outrigger (extended)	11 ft. 8 in.
Outrigger (retracted)	8 ft.
Hydraulics	Tandem pump for simultaneous operation of multiple functions
Operator Controls:	
Standup	Individual levers or pilot-operated hydraulic joysticks
Rotating platform	Mechanical joysticks or pilot-operated hydraulic joysticks

### BODY



Length	18 / 19 / 20 ft.
Capacity	20 / 24 / 25 / 30 cubic yds.
Tilt	45° +/- 1°
Floor	3/16 in. (1/4 in. optional) 8 in. main sill 4 in. joist with 12 in. spacing
Sides	Side ribs 24 in. spacing
Lighting	L.E.D. Mid-body turn signals (where applicable) Smart light

### BUCKET

Width	4 ft.
Fully open	5 ft.

### OPTIONS

- Greaseless mechanical levers (optional hydraulic joystick)
- Hydraulic oil cooler
- Side arm hopper
- Door style options: single, double, barn, or scow
- Tarp options: spring assist with arm, spring assist armless, electric with arm
- Customer specific light location
- "Outrigger Up" safety feature
- Optional pneumatic air latch for rear door
- Body up alarm
- Nylon bearing outriggers

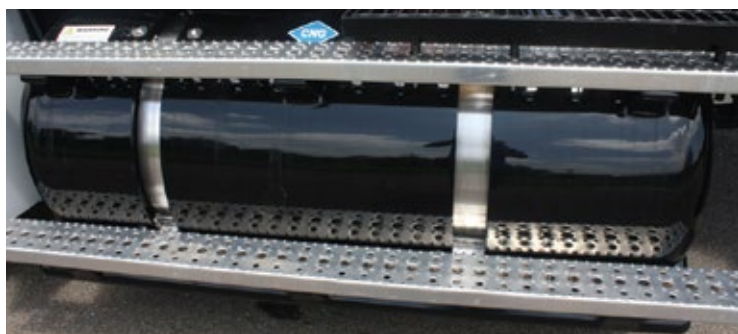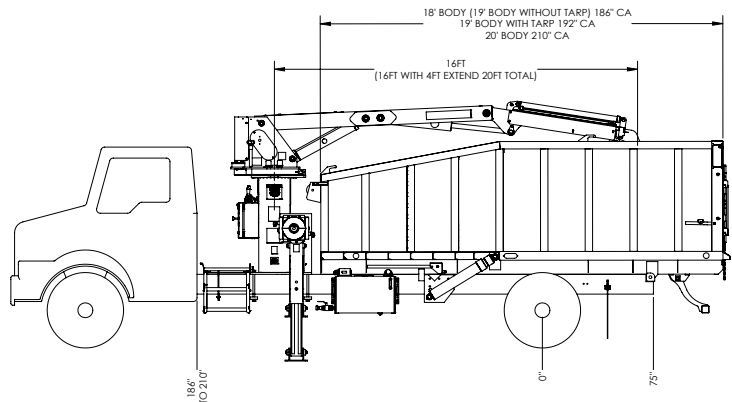

Pac-Mac can accommodate a variety of CNG tank options including saddle tanks below the rail or back of cab, above the rail

### FEATURES

- Boom Height Alarm
- All hoses are enclosed within pedestal
- Pilot operated hydraulic joysticks
- H-style outrigger design
- Built-in holding valves for safety
- Smooth pads for minimal street damage
- Twin cylinders provide superior biting force (bucket)
- High strength tempered steel replaceable cutting edges (bucket)
- Anti-scalp design (bucket)
- 360 degree continuous rotation (bucket)
- Easy to use when handling heavy, bulky materials
- Complete discharge due to fully opening, swinging door(s)
- Bumper meets D.O.T. rear impact standards
- Twin telescopic dump cylinders
- 45 degree body tilt for complete cleanout
- Integral holding valves in main and tip boom cylinders for increased safety
- Ductile iron gland/piston, chrome rods, replaceable bronze bushings
- 1 year hydraulic warranty
- 3 year structural warranty
- 3 year warranty on gearbox and slewing ring

All design, specifications, and components are subject to change at the manufacturer's sole discretion at any time without notice. Data published herein is for informational purposes only and shall not be construed to warrant suitability of the unit for any particular purpose, as performance may vary with the conditions encountered. The only warranty is our standard written warranty for this product at the time of shipment.



**POWERED BY**  
**HOL-MAC**  
CORPORATION