



## **KB-220 SERIES**

### ***HERE COMES THE BOOM***

The KB-220 Series functions in solid waste, tree care, and the forestry industry, with a boom reach of up to 25 feet. This unit comes standard with hydraulic joysticks and a tandem pump for even smoother operation. The KB-220 is quality built with pride. DO IT RIGHT with Pac-Mac®!

Sourcewell 

Awarded Contract

Contract # 040621-HMC

**HGACBuy™**  
THE SMART PURCHASING SOLUTION



**E-PAC-MAC.COM**

Manufactured by Hol-Mac Corporation  
P.O. Box 349 • Bay Springs, MS 39422 • 601-764-4121





# KB-220 SERIES

## TECHNICAL DATA AND SPECIFICATIONS

### GENERAL SPECIFICATIONS

Height of boom to ground in lowest travel position (based on 42 in. chassis height)	12 ft. 6 in. stand up 13 ft. 1 in. rotating platform
Boom length	20 ft. fixed 22 ft. fixed
Optional boom lengths	23 ft. (20 ft. with 3 ft. extended) 25 ft. (22 ft. with 3 ft. extended)
Boom rotation	270° non-continuous (stand up) 360° continuous (only on crows nest)
Lifting capacity at 22 ft.(with bucket)	Varies with boom length
Hydraulics	Tandem pump for simultaneous operation of multiple functions
Operator Controls:	
Standup	Pilot-operated hydraulic joysticks
Rotating platform	Mechanical joysticks or pilot-operated hydraulic joysticks

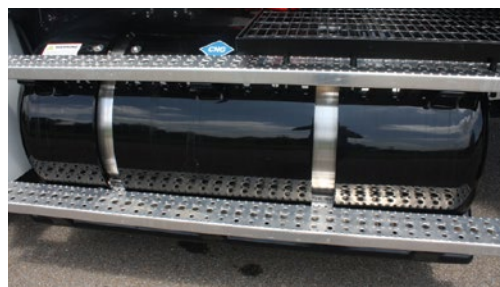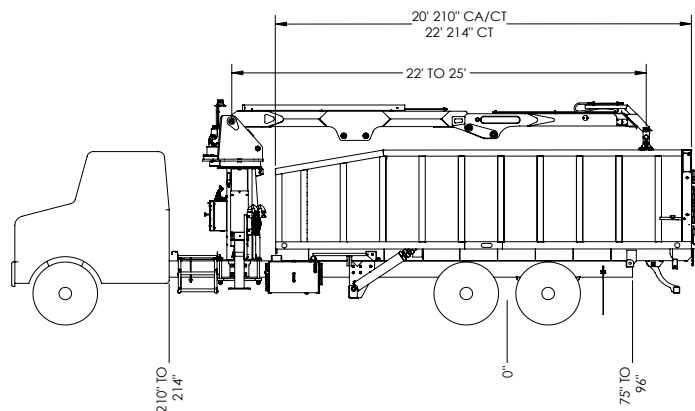

Pac-Mac can accommodate a variety of CNG tank options including below the rail saddle tanks or back of cab, above rail tanks



One-piece door with bucket rests available on certain models

### BODY

Length	20 or 22 ft.
Capacity	30 / 40 cubic yds.
Tilt	45° +/- 1°
Floor	3/16 in. (1/4 in. optional) 4 in. joist with 12 in. spacing
Sides	Side ribs 24 in. spacing
Lighting	L.E.D. / Mid-body turn signals Strobes in rear corner of post

### BUCKET

Width	4 ft. - (32" wide optional)
Fully open	5 ft.

### FEATURES

- ▶ Air latch
- ▶ All hoses are enclosed within pedestal
- ▶ Rotating operator's station
- ▶ Mechanical joysticks
- ▶ Pilot-operated hydraulic joysticks
- ▶ Pilot-operated swing control (only on crows nest)
- ▶ 360-degree continuous boom rotation (only on crows nest)
- ▶ A-style outrigger design
- ▶ Ease of outrigger removal and maintenance
- ▶ Built-in holding valves for safety
- ▶ Smooth pads for minimal street damage
- ▶ "Outrigger Up" safety feature (optional)
- ▶ Boom up sensor
- ▶ Twin cylinders provide superior biting force (bucket)
- ▶ High strength tempered steel replaceable cutting edges (bucket)
- ▶ Anti-scalp design (bucket)
- ▶ 360-degree continuous rotation (bucket)
- ▶ Integral holding valves in main and tip boom cylinders for increased safety ▶ Ductile iron gland/piston, chrome rods, replaceable bronze bushings
- ▶ Bumper meets DOT standards
- ▶ 1-year hydraulic warranty

### OPTIONS

- ▶ Hardox body
- ▶ Door style options: single, double, or scow
- ▶ Tarp options: spring assist with arm, spring assist armless, electric with arm

All design, specifications, and components are subject to change at the manufacturer's sole discretion at any time without notice. Data published herein is for information purposes only and shall not be construed to warrant suitability of the unit for any particular purpose, as performance may vary with the conditions encountered. The only warranty is our standard written warranty for this product at the time of shipment.



**POWERED BY**  
**HOL-MAC**  
CORPORATION