

TECHNICAL SPECIFICATION

(from series 2018 on)




KÄSSBOHRER ALL TERRAIN VEHICLES, INC.

BeachTech 3000

Data Sheet

Cleaning method		BechTech 3000
	patented	raking-screening-mixed technique
Tractor requirements		
	power output	minimum 100HP at PTO
	4-wheel-drive	
	differential lock	
	high flotation tires, width	1'8" front, 1'12" back (sand tires)
	drawbar for towing eyes Ø 1.57", adjustable up to approx.	3" height
	PTO shaft stub	Z6, 1 3/8"
	power take-off AR NORM	1.000 rpm
	supported load	3,307 lbs
	electrical circuit	standardized socket, 12 V
Dimensions		
length	waste container in operational	23'
	with waste container on top	18'7"
width	with standard tires	8'9"
	incl. finisher	9'2"
	working width	8'2"
height	vehicle	7'4"
	discharge of dump body	5'1"
Tires		
	low-pressure tires, wide	500/60-22.5
Weight		
	net weight	7,055 lbs
	wide, low pressure*	
Tank capacity		
	hydraulic oil	10.6 gallons
Performance		
	ground coverage up to	7.4 acres/hour
Working depth		
	up to**	10"
Screen surface		
	screening belt	+ - 75 sq.ft.
Capacity		
	collecting hopper	1 cu.yd.
	dump body	7 cu.yd.
Speed		
	max. working speed**	7.5 mph
	traffic*	25 mph

Specifications *according to local traffic regulations; **depending on nature of the ground; Optional road licensing, according to local traffic regulations, possible.

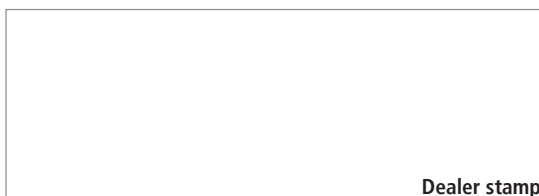

BeachTech

Tel.: (770) 386-6984
Email: info@beach-tech.com
www.beach-tech.com

The possibility of changes to the product after the editorial closing date for this publication cannot be ruled out.