

ROLL OFFS



P.O. BOX 727
DURANT, OK 74702-0727
580-924-6355

PRODUCT LINE

HOISTS

ROLL-OFFS

CONCRETE WASHOUT ROLL-OFFS

VACUUM BOX ROLL-OFFS

SELF-CONTAINED &
STATIONARY COMPACTORS

RECEIVERS

FRONT LOAD CONTAINERS

REAR LOAD CONTAINERS

SIDE LOAD CONTAINERS



For more product information
visit our website:

www.rolloffs.net

Field Proven and built to last!



HOISTS IN STOCK!

SELF-CONTAINED



ROLL-OFF CONTAINERS



FRONT LOAD CONTAINERS



HOISTS

Model

Box Length
Capacity
Lift & Reeving Cylinders
(Interchangeable)
Frame Material

HO6022

22 foot
60000 lbs
6" Bore x 79" stroke x 4" Rod
10" x 4" x 1/2" Rectangular Tubing
ASTM A-500 Grade-C
With 1/2" x 3" Bar Wear Strips
10" x 2.25" CRS Diameter Bronze Bushings

7/8" EXWRC
4" diameter x 3.75 long CR Steel With Bronze Bushing
At All Wear Points
Approx 50 deg
7/8" Steel Plate
2.5" CR Diameter Axel
Automatic, 2" Diameter Pin, Stress Proof CFA 311
Strap and Ratchet 7/8" Steel Hook
8.5" OD x 3/4" Wall x 27" Long Axel

Automatic Fold Up As Hoist Raises
In Cab Buzzer
97 Dec

HO7522

22 foot
75000 lbs
7" Bore x 79" Stroke x 4" Rod

10" x 4" x 1/2" Rectangular Tubing
ASTMA A-500 Grade-C
With 1/2" x 3" Bar Wear Strips
10"x2.25" CRS diameter Bronze bushings

7/8" EXWRC
4" Diameter x 3.75 long CR Steel With Bronze Bushings
At All Wear Points
Approx 50 deg
7/8" Steel Plate
2.5" CR Diameter Axel
Automatic, 2" Diameter Pin, Stress Proof CFA 311
Strap and Ratchet 7/8" Steel Hook
8.5" OD x 3/4" Wall x 27" Long Axel

Automatic Fold Up As Hoist Raises
In Cab Buzzer
97 Dec



HEAVY DUTY 2.5"
REAR HINGE



QUICK CHANGE 3/4"
WALL REAR ROLLER



CUSTOM IN-CAB AIR
CONTROLS




BRONZE SHEAVE
BUSHING

ROLL - OFFS

| | COMPETITION | STANDARD | HEAVY | SUPER |
|----------------|-------------|-------------|-------------|-------------|
| ■ Floor | 3/16" | 3/16" | 1/4" | 1/4" |
| ■ Crossmembers | 24" Centers | 18" Centers | 18" Centers | 12" Centers |
| ■ Long Sills | 6x2x3/16" | 6x2x3/16" | 6x2x1/4" | 6x2x1/4" |
| ■ Walls | 12 ga | 12 ga | 10 ga | 3/16" |
| ■ Post Spacing | 36" | 24" | 24" | 24" |
| ■ Top Rails | 4x3x11ga | 4x3x11ga | 4x3x11ga | 4x3x3/16" |
| ■ Hook Plates | 7/8" | 7/8" | 7/8" | 7/8" |
| ■ Hook | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" |
| ■ Rear Rollers | 8" x 9" | 8" x 9" | 8" x 9" | 8" x 9" |
| ■ Push Plates | NONE | 1/2 | 1/2 | 1/2" |

BATHTUB

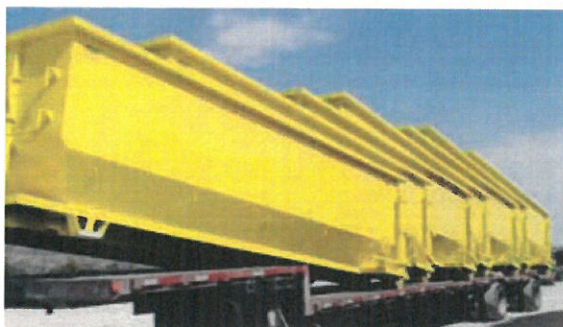

RECTANGLE



| | COMPETITION | STANDARD | HEAVY |
|----------------|-------------|-------------|-------------|
| ■ Floor | 3/16" | 3/16" | 1/4" |
| ■ Crossmembers | 24" Centers | 18" Centers | 18" Centers |
| ■ Long Sills | 6x2x3/16" | 6x2x3/16" | 6x2x1/4" |
| ■ Walls | 12 ga. | 10 ga. | 3/16 |
| ■ Top Rails | 4x3x11ga. | 4x3x3/16" | 4x4x1/4" |

For more product information
visit our website www.rolloffs.net

FRONT LOAD CONTAINERS

SPECS

STANDARD

HEAVY

| | | |
|-----------------------------------|---|---|
| Floors..... | 10 ga..... | 10 ga |
| Walls..... | 12 ga..... | 12 ga |
| Front, Rear & Side Top Rails..... | 1 1/2 x 2 1/2 Struct. Tubing..... | 1 1/2 x 2 1/2 Struct. Tubing |
| Lift Pockets..... | 7 ga..... | 7 ga |
| Bluderbuss..... | 7 ga..... | 7 ga |
| Lift Pocket Gussets..... | Full Length Top and Bottom..... | Full Length Top and Bottom |
| Lid Brackets..... | 7 ga..... | 7 ga |
| Door Track Channel..... | 3/16"..... | 3/16" |
| Floor Support..... | 4-7 ga Pads & 1 Full Length Formed Channel..... | 3-3" Structural Channel Full Length Skids |
| Lids..... | Single Wall..... | Double Wall or Single Wall |



WE HAUL ANYWHERE

*One of these or All of these loads
could be yours. CALL US!*




**BUILT
TO LAST!**



**FIELD
PROVEN!**

SELF-CONTAINED COMPACTORS

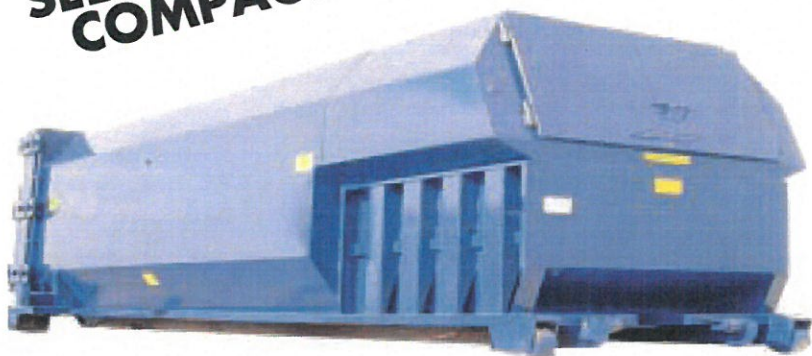

shown with optional doghouse hopper

- COMPACTOR WALLS 1/4"
- COMPACTOR FLOOR 1/2"
- RAM CONSTRUCTION 1/4"
- RAM FLOOR & FACE 1/2"
- CROSS MEMBERS 4" Chan
- WALL POST 1/4"
- MID POST 3/16"
- TOP PLATE 10 ga.

QUALITY PARTS FEATURING:

- Baldor Electric Motors
- Permco or Prince Hyd, Pumps
- Northman Hyd. Solenoid Valves
- Vescor Components
- Cuttler - Hammer & Centable Motor Starter
- Cuttler-Hammer Switches
- 1/4" thick Hydraulic Tank

★ Performance Data

- ♦ Cycle Time 24s
- ♦ Total Force 46,900 lb.
- ♦ Ram Pressure 27.0 psi
- ♦ Ram Penetration 9"

★ Electrical Equipment

- ♦ Electric Motor 10hp (240/480 V)
- ♦ Electric Control Voltage 120VAC

★ Charge Box Capacity

- ♦ Mfrs. Rating 1.8 cu yd
- ♦ WASTEC Rating 1.5 cu yd
- ♦ Clear Top Opening 40"L X 58"W

STATIONARY COMPACTORS



shown with optional hopper

SMARTPACK MONITORING SYSTEM



Is costly compactor repair driving profits down? Dramatically speed up repair and keep customers happy. Let **SmartPack** do the trouble shooting for you.

Roll-Offs USA, Inc. CALL: 580-924-6355

ROLL OFFS



America


Open Top Roll-Offs

Our Standard Duty Roll-Offs Feature:

Understructure • 3" Structural Channel on 18" center

- 1/2" Push Plate
- 24" Center Wall Post
- 12ga Gate Sheet
- 12 ga Head Sheet

**FIELD PROVEN
AND
BUILT TO LAST**

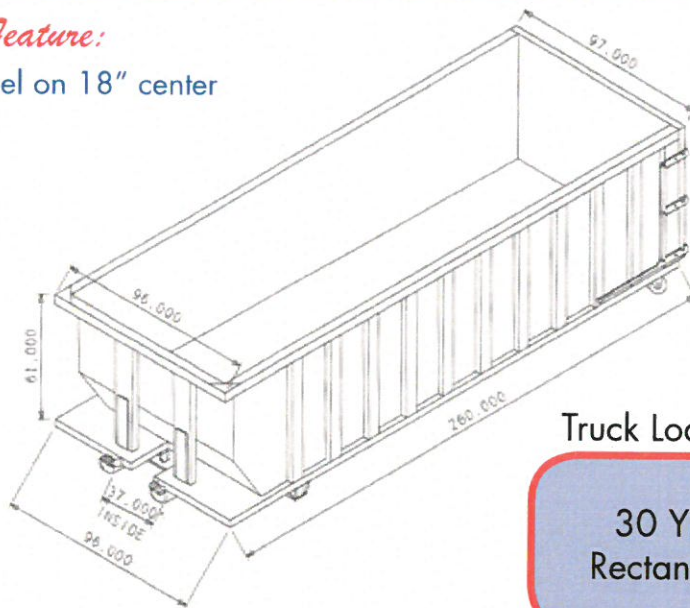

Truck Load: 5


**30 YD
Rectangle**

SPECIFICATIONS

| | COMPETITION SERIES | STANDARD DUTY RECTANGLE | HEAVY DUTY RECTANGLE | SUPER DUTY RECTANGLE | STANDARD BATHTUB | HEAVY DUTY BATHTUB |
|--------------------------|-----------------------|----------------------------|-------------------------|-------------------------|---------------------|-----------------------|
| Floor | 3/16" | 3/16" | 1/4" | 1/4" | 3/16" | 1/4" |
| Wall | 12 ga. | 12 ga. | 10 ga. | 3/16" | 10 ga. | 3/16" |
| Crossmembers | 24" | 18" | 18" | 12" | 18" | 18" |
| Wall Post Spacing | 36" | 24" | 24" | 24" | | |
| Long Sills | 6x2x3/16" | 6x2x3/16" | 6x2x1/4" | 6x2x1/4" | 6x2x3/16" | 6x2x1/4" |
| Top Rail | 4x3x11 ga. | 4x3x11 ga. | 4x3x11 ga. | 4x3x3/16" | 4x3x3/16" | 4x4x1/4" |
| Door Sheet | 12 ga. | 12 ga. | 12 ga. | 3/16" | 12 ga. | 3/16" |
| Head Sheet | 12 ga. | 12 ga. | 12 ga. | 3/16" | 12 ga. | 3/16" |
| Hook | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" | 1 1/4" |
| Hook Plate | 7/8" | 7/8" | 7/8" | 7/8" | 7/8" | 7/8" |


(580) 924-6622 • (800) 468-6826 • P.O. BOX 727 • DURANT, OK 74702

1/2" Push Plates
give longer life.

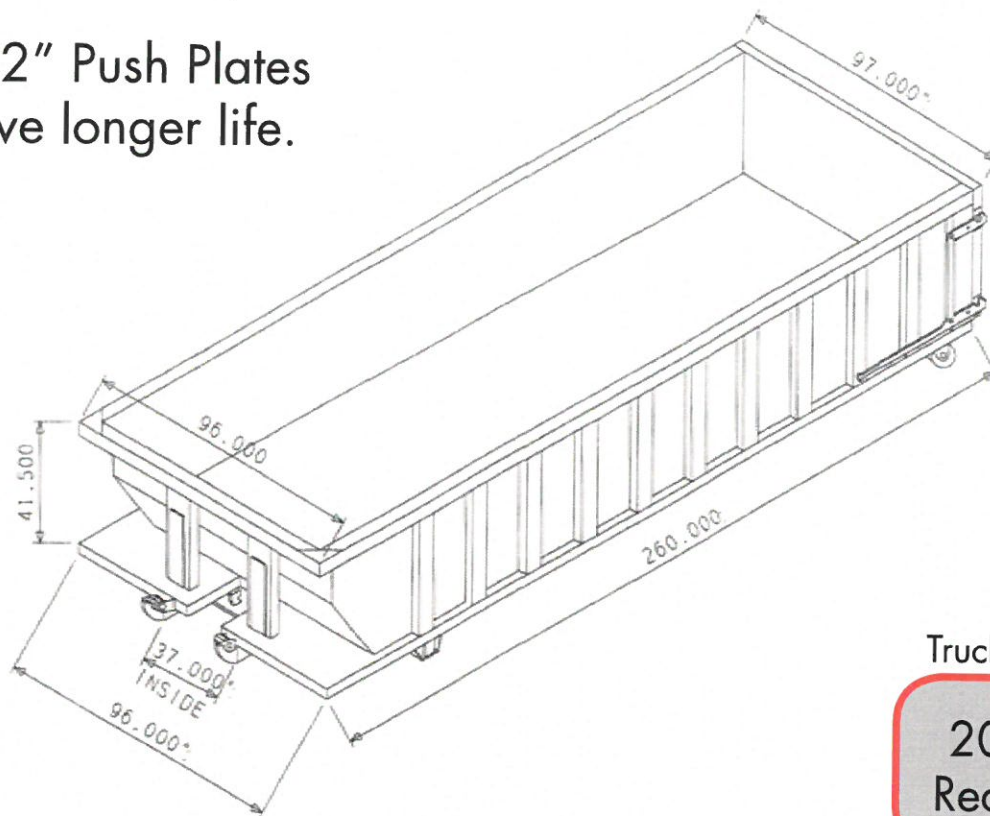

Truck Load: 5


20 Yard
Rectangle

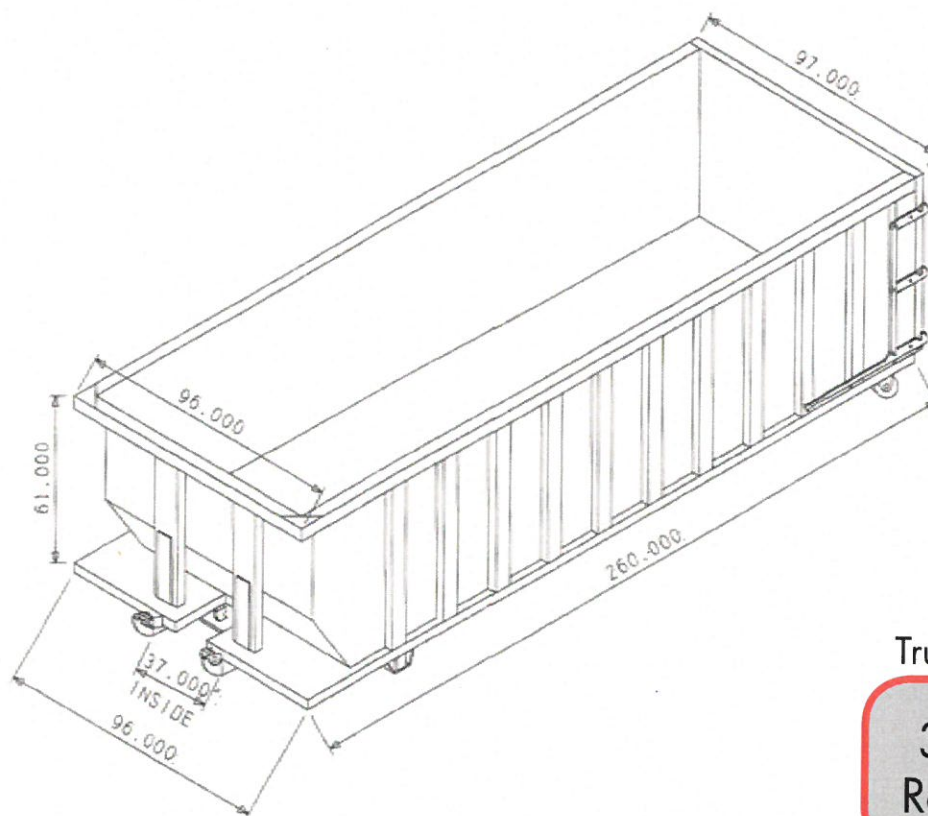

Truck Load: 5

30 Yard
Rectangle


COST EFFECTIVE -
BUILT TO LAST!

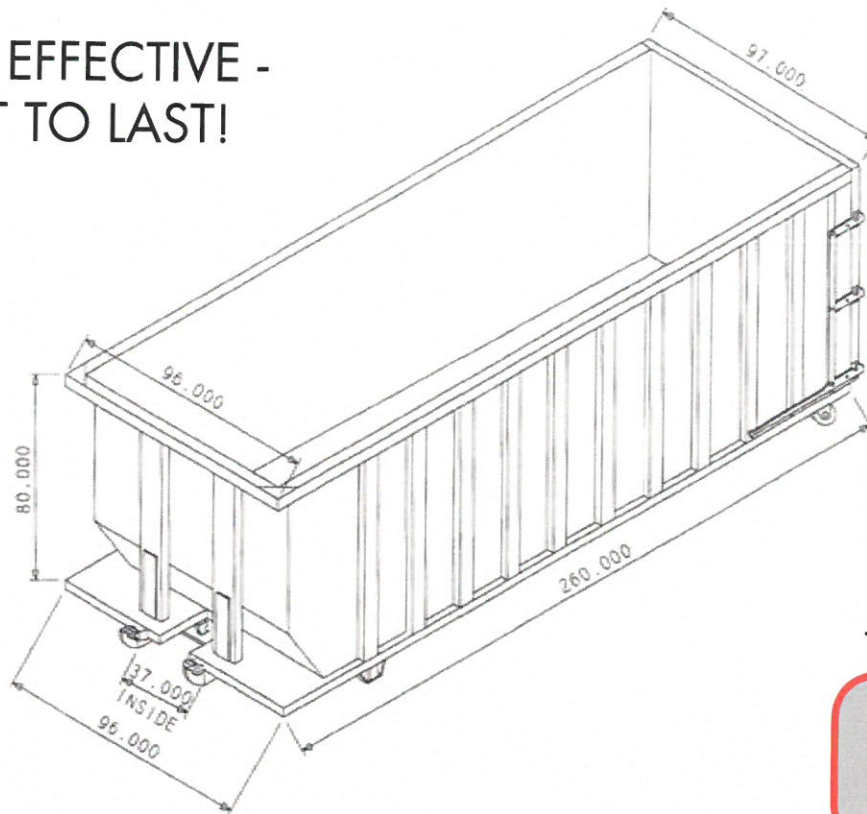

Truck Load: 4

40 Yard
Rectangle


Sidewalls are one
Piece Construction
- No Seams -

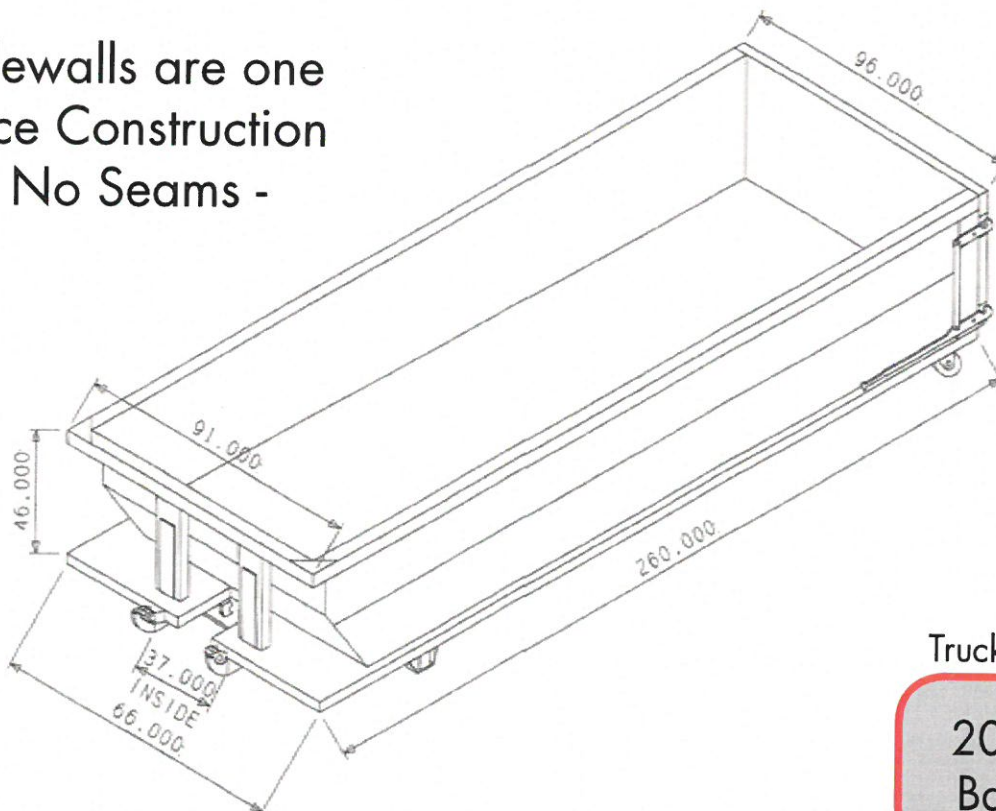

Truck Load: 8

20 Yard
Bathtub


Bathtub Floors
All one-piece Construction
- No Seams -

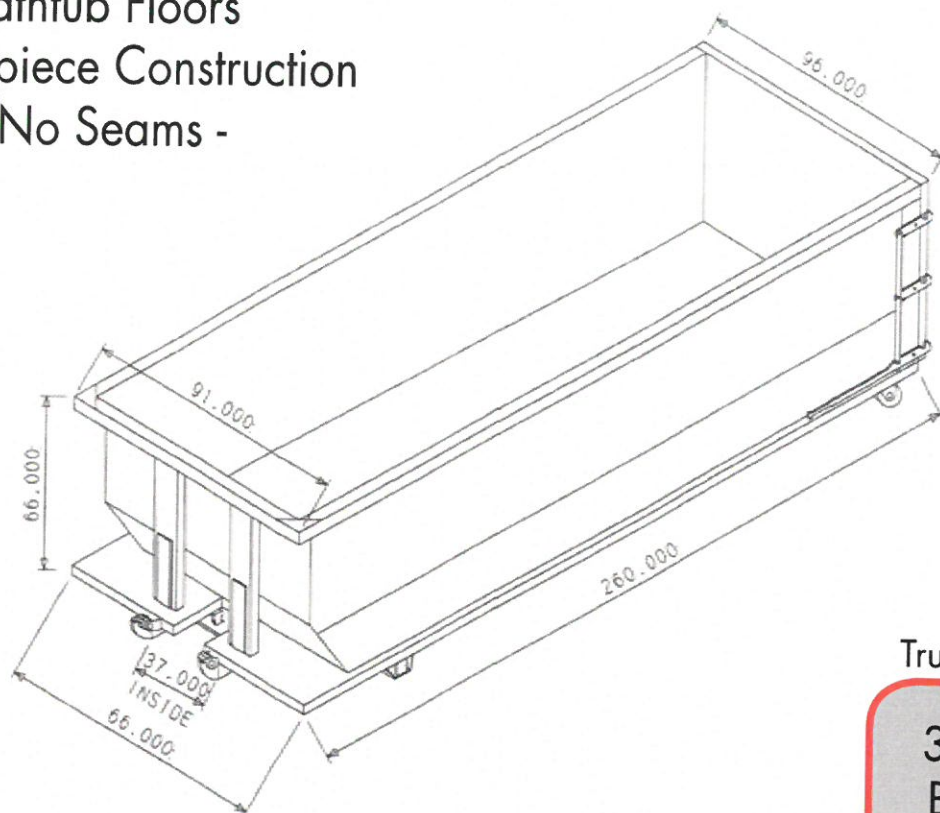

Truck Load: 7

**30 Yard
 Bathtub**


40yd. Bathtub has 2 huge
 1/4" Hinge Post to prevent
 Gate Sagging. Long Release
 Handle provides plenty of
 leverage.

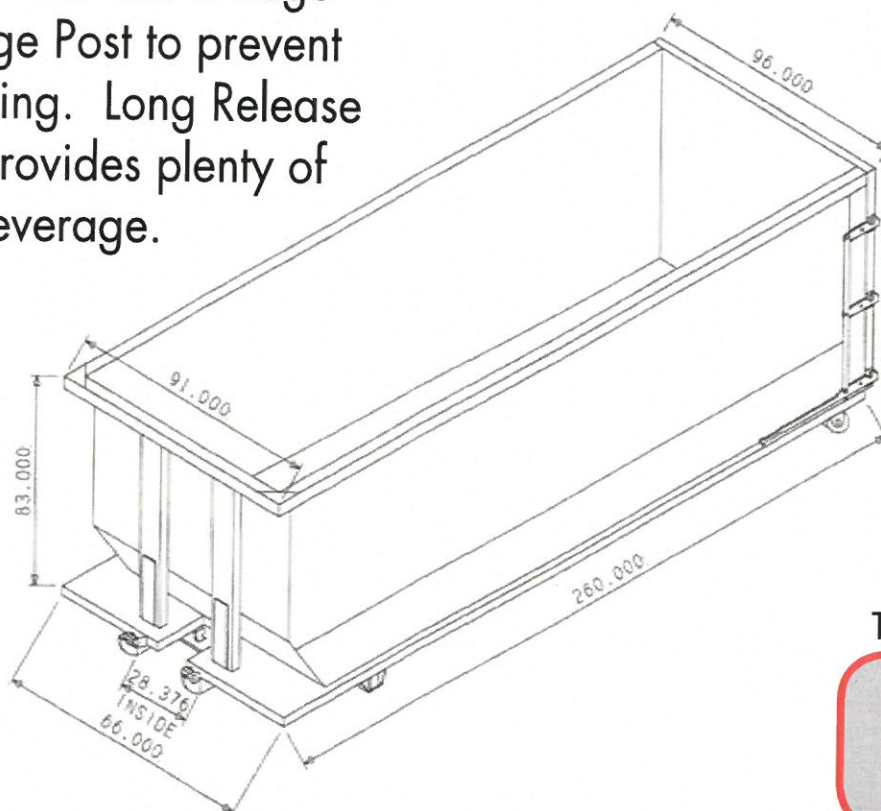

Truck Load: 5

**40 Yard
 Bathtub**

TO ORDER CALL (800) 468-6826

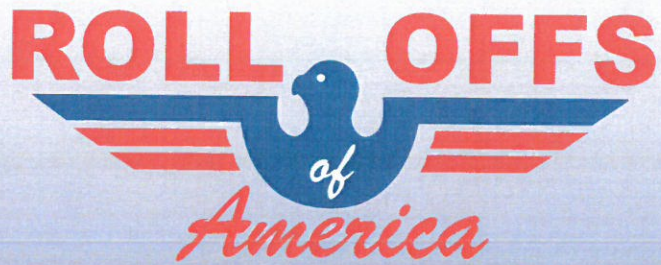

Super Duty Round Bottom


FIELD PROVEN – COST-EFFECTIVE – ECO-FRIENDLY

Specifications:

- 1/4" Floor
- 3/16" Walls
- 6" x 2" x 1/4" Long Sills
- 4" x 4" x 1/4" Top Rail
- Cross members –18"
- 1 1/4" Hook
- 7/8" Hook Plate
- 1/2" Push Plates
- Available in 20CY, 25CY, 30CY, and 40CY

OPTIONS:

- Cross members –12" Centers
- Watertight construction with Hydrostatic testing
- Roll-Over Tarps, Metal Rolling lids, etc.
- A-Frame –Hook Lift
- Front Wheels w/outriggers
- Grit blasting and special coatings
- Additional Body Bands and Gate Reinforcements
- Custom Configurations Available

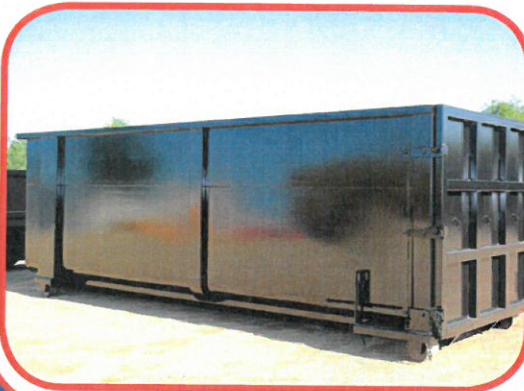



G & H Model H06022K ROUSA
G & H Model H07522K ROUSA

designed by
G & H Manufacturing
"Buy Smart - Buy G&H"



| Specifications Model | H06022K ROUSA | H07522K ROUSA |
|---|---|---|
| Box Length | 22 foot | 22 foot |
| Capacity | 60,000 lbs | 75,000 lbs |
| Lift & Reeving Cylinders (Interchangeable) | 6" Bore x 79" Stroke x 4" Rod | 7" Bore x 79" Stroke x 4" Rod |
| Frame Material | 10" x 4" x 1/2" Rectangular Tubing ASTM A-500 Grade-C w/1/2" x 3" Bar Wear Strips | 10" x 4" x 1/2" Rectangular Tubing ASTM A-500 Grade-C w/1/2" x 3" Bar Wear Strips |
| Cable Sheaves (all 5 interchangeable) | 10" x 2.25" CRS Diameter w/Aluminum Bronze Bushings | 10" x 2.25" CRS Diameter w/Aluminum Bronze Bushings |
| Cable | 7/8" EXWRC | 7/8" EXWRC |
| Rollers (outside) | 4" diameter x 3.75" long CR Steel w/Aluminum Bronze Bushings | 4" diameter x 3.75" long CR Steel w/Aluminum Bronze Bushings |
| Grease Fittings | At All Wear Points | At All Wear Points |
| Dump Angle | Approximately 50° | Approximately 50° |
| Front Stops | 7/8" Steel Plate | 7/8" Steel Plate |
| Rear Hinge | 2.5" CR Diameter Axel | 2.5" CR Diameter Axel |
| Front Container Lock | Automatic, 1 1/2" Diameter Pin CR1018 | Automatic, 1 1/2" Diameter Pin CR1018 |
| Rear Hold Down | Strap and Ratchet 7/8" Steel Hook | Strap and Ratchet 7/8" Steel Hook |
| Rear Ground Roller (Quick Change) | 8.5" OD x 3/4" Wall x 27" Long Axel | 8.5" OD x 3/4" Wall x 27" Long Axel |
| Bumper | ICC Manual Fold Bumper | ICC Manual Fold Bumper |
| Hoist Up Alarm | In Cab Buzzer | In Cab Buzzer |
| Back up Alarm | 97 Dec | 97 Dec |
| Hydraulics | Hard Plumbing with 5 Bank Valve | Hard Plumbing with 5 Bank Valve |

(580) 924-6622 • (800) 468-6826 • P.O. BOX 727 • DURANT, OK 74702

Options Chassis Speciation's RECOMMENDED GVWR

| | |
|---|------------|
| Front | 18000 lbs |
| Rear | 44000 lbs |
| Total GVWR. | 62,000 lbs |
| Frame Height | 41" - 45" |
| After Frame | 59" |
| Clear of Side Obstructions behind Cab | 34" |
| Recommended Container Length | 18' to 22' |

APPROX. WEIGHT MOUNTED

| | |
|---------------------|----------|
| Front | 1800 lbs |
| Rear | 6900 lbs |
| Total GVWR. | 8700 |

Tarppers:

- Pioneer, O'Brian, Roll Rite, Donavan

Fenders:

- Steel, Aluminum, or Plastic Fenders

Other Options:

- Inside Air Controls Joy stick or 2 levers
- Fire Extinguisher
- 24' Box Capacity 24' Hoist
- Stinger (Extendable Tail)
- Automatic Box Locks
- Auxiliary Hydraulic Power Hookups
- Pusher Type 3rd Axle
- Inside/Outside Rail
- Behind The Cab Oil Tank
- Tool Boxes: **24", 36", 48"**
- Container Stops: Fold Up/Drop In
- Rear Window Screen — Cab Guard
- Pintle Hook (**Hoist is standard with Pintle Hook Plate Drilled for Pintle Hook**)
- 2" Suction Hose
- Rear ½" x 4" Approach Ramps
- LED Lights
- Automatic Air Assist Bumper

Performance

Model 60000

- Hydraulic System 40 Gal. Side Mounted Tank
- Filtration 100 Mesh Suction S trainer/10 Micron Return Filter
- Pressure 1900 PSI
- Flow 36 GPM @ 1500 RPM
- Hoist Up: 24 Sec
- Hoist down: 14 Sec
- Cable In: 22 Sec.
- Cable Out: 12 Sec.

Model 75000

- Hydraulic System 40 Gal. Side Mounted Tank
- Filtration 100 Mesh Suction S trainer/10 Micron Return Filter
- Pressure 1900 PSI
- Flow 36 GPM @ 1500 RPM
- Hoist Up: 32 Sec.
- Hoist down: 23 Sec.
- Cable In: 25 Sec.
- Cable Out: 14 Sec.

ROLL OFFS



Front End Loader Containers


**DURABLE
AND
FIELD PROVEN!**

Heavy Duty Features!

- 10 ga. Floors
- Full Length Sleeve Gussets Top & Bottom Tubing - Top Rail Stronger
- 3/16" Blunderbuss
- 3/16" Lid Brackets
- Tough 3/16" Door Track Channel



3 YD



4 YD



6 YD SLANT



6 YD 2-DOOR
SLANT BACK



6 YD HIGH



6 YD LOW



8 YD SLANT



8 YD 2-DOOR
SLANT BACK




8 YD HIGH




8 YD LOW

(580) 924-6622 • (800) 468-6826 • P.O. BOX 727 • DURANT, OK 74702

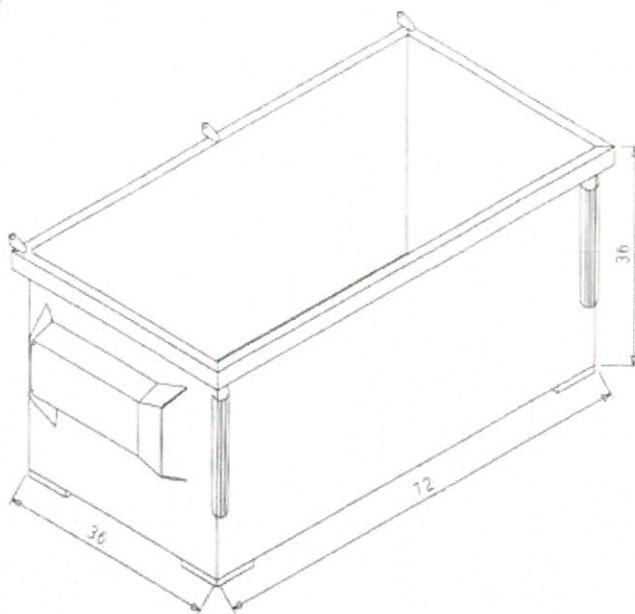


Truck Load: 44

2YD
Front Load

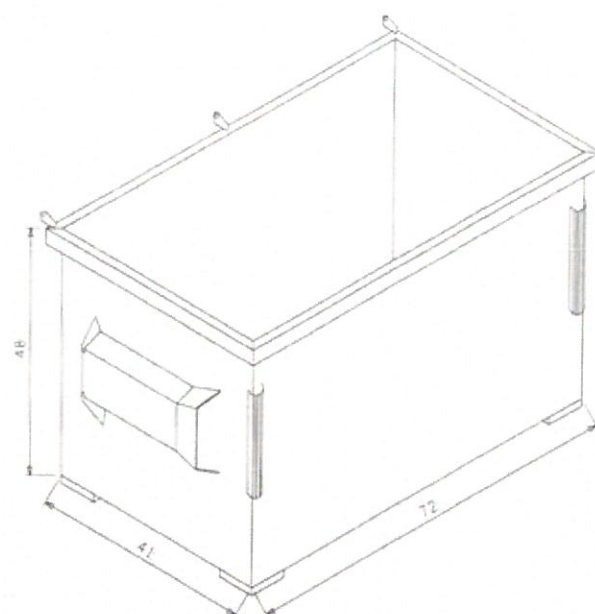


Truck Load: 30

3YD
Front Load

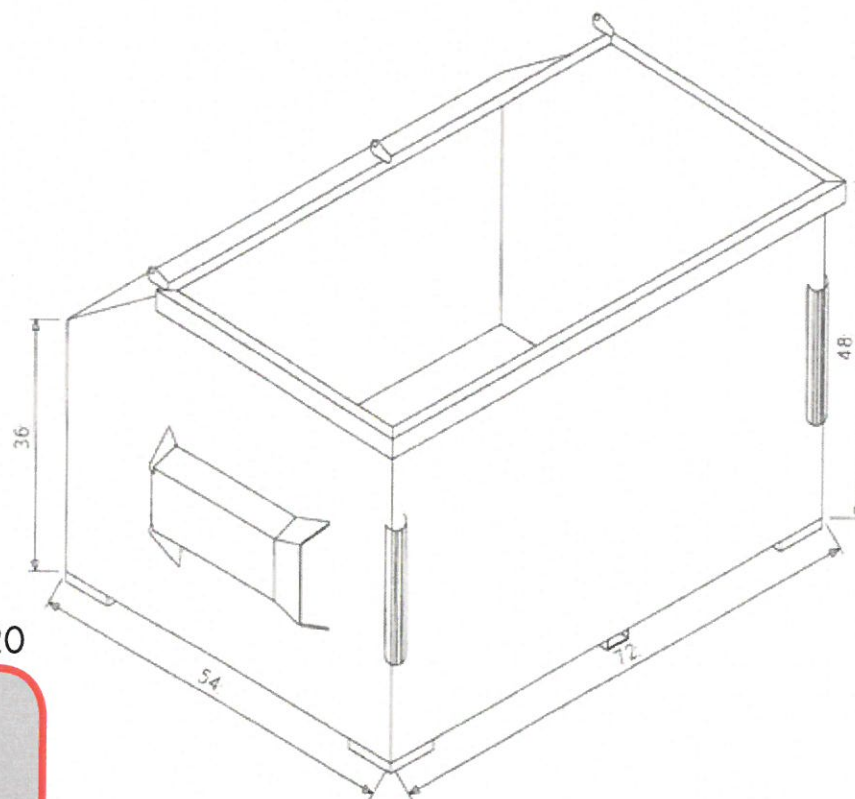


Truck Load: 20

4YD
Front Load

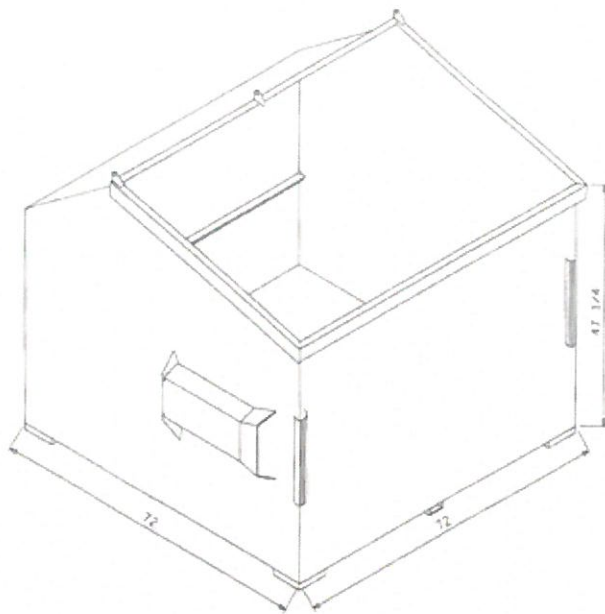


Truck Load: 14

6YD
Slant
Front Load

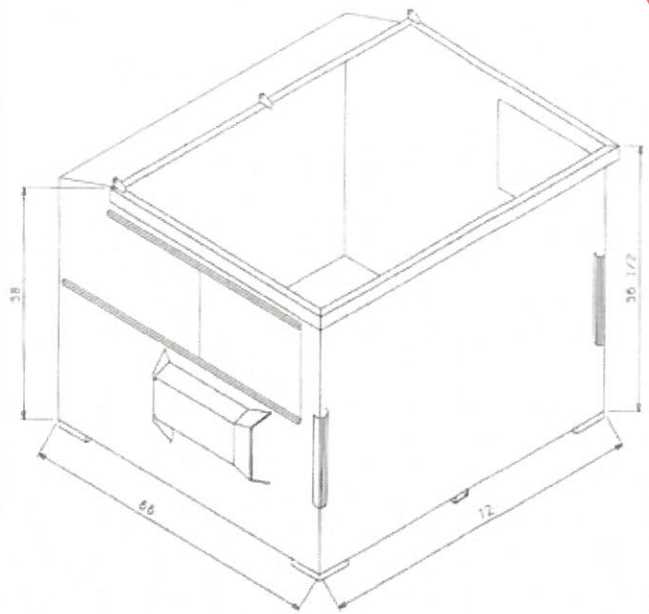


Truck Load: 16

6YD
2-Door
Slant Back

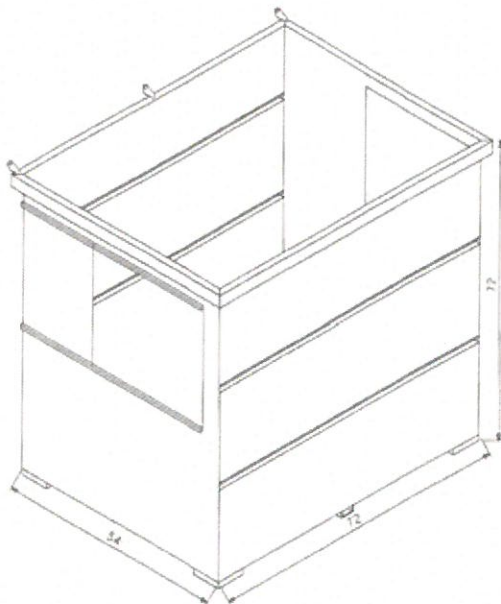


Truck Load: 11

6YD
High
Front Load

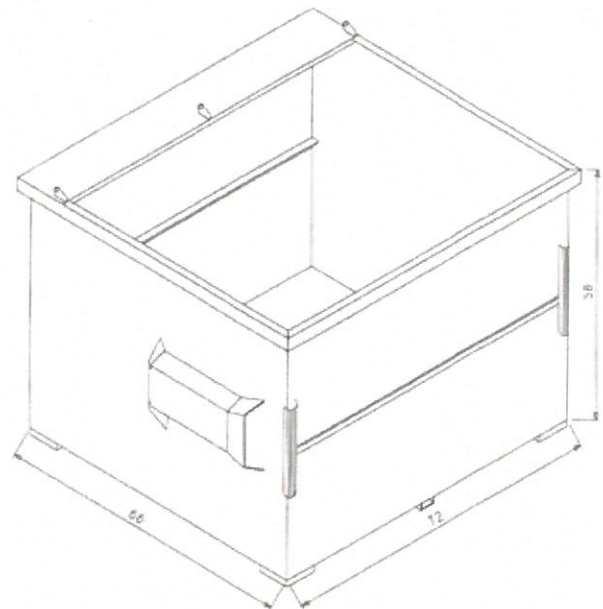


Truck Load: 16

6YD
Low
Front Load

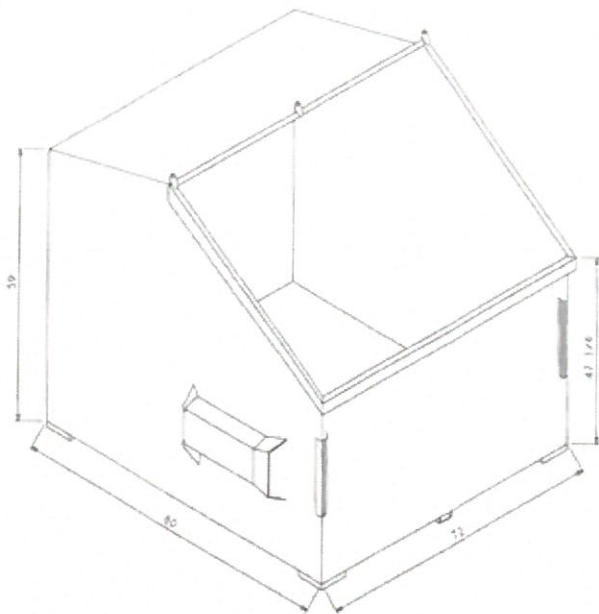

Truck Load: 8


8YD
Slant
Front Load

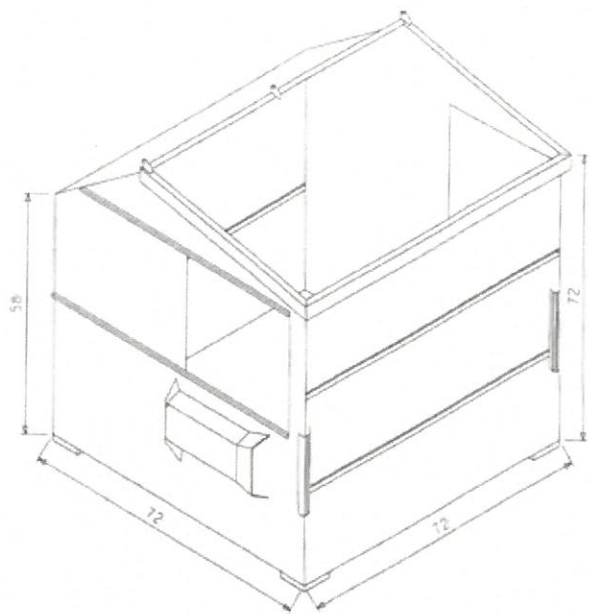

Truck Load: 9


8YD
2-Door Slant
Front Load

**Slope back
helps prevent
hang ups and is
easy on the lids**

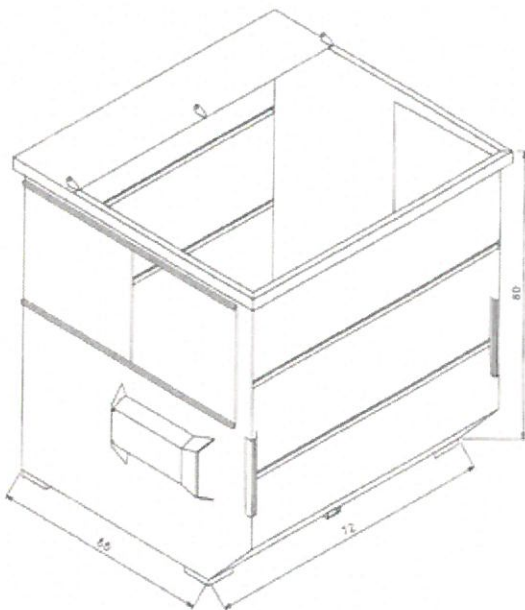


Truck Load: 9

8YD
High
Front Load

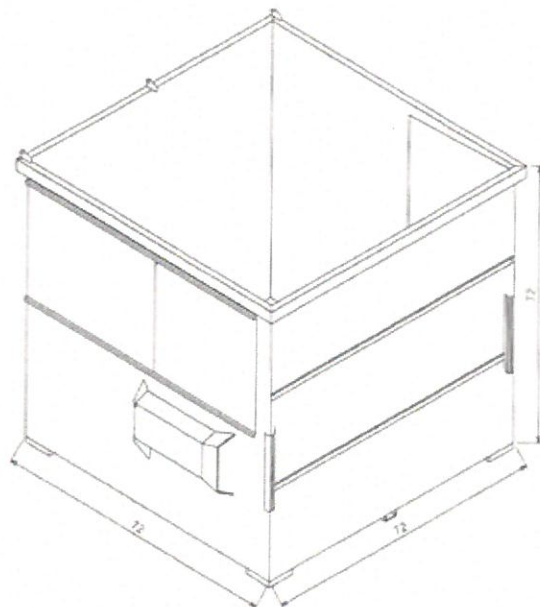

Truck Load: 9

8YD
Low
Front Load

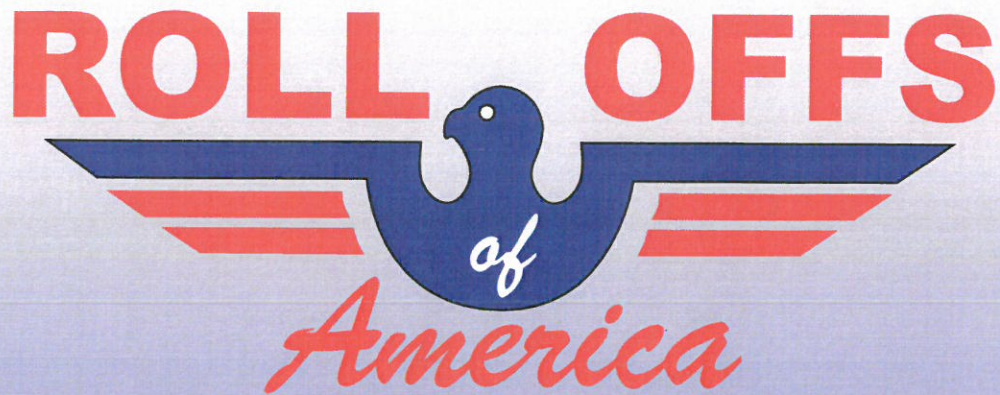

Rear Load Containers


**COST EFFECTIVE
AND
BUILT TO LAST!**

Heavy Duty Features!

- All 12 ga. Panels
- Extra Heavy Trunnion Bars
- Nestable for Shipping
- Swing-a-way Lid System


SPECIFICATIONS

| | TRUNNION BAR | BODY PANELS | BACK RAIL | SIDE RAILS | BOTTOM RUNNER | LIDS |
|-------------------------|-----------------|----------------|--------------|---------------|------------------|-------------|
| 2 YD | 1 1/4" | 12 ga. | 10 ga. | 10 ga. | 10 ga. | 2 - 31 x 44 |
| 3 YD | 1 1/2" | 12 ga. | 3/16" | 10 ga. | 10 ga. | 4 - 31 x 37 |
| 4 YD w/Casters | 1 1/2" | 12 ga. | Double 3/16" | 10 ga. | 10 ga. | 4 - 31 x 44 |
| 4 YD w/o Casters | 1 1/2" | 12 ga. | 3/16" | 3/16" | 3" Channel | 4 - 31 x 37 |
| 6 YD | 1 3/4" | 12 ga. | Double 3/16" | 3/16" | 3" Channel | 6 - 31 x 37 |
| 8 YD | 1 3/4" | 12 ga. | Double 3/16" | 3/16" | 3" Channel | 6 - 31 x 44 |

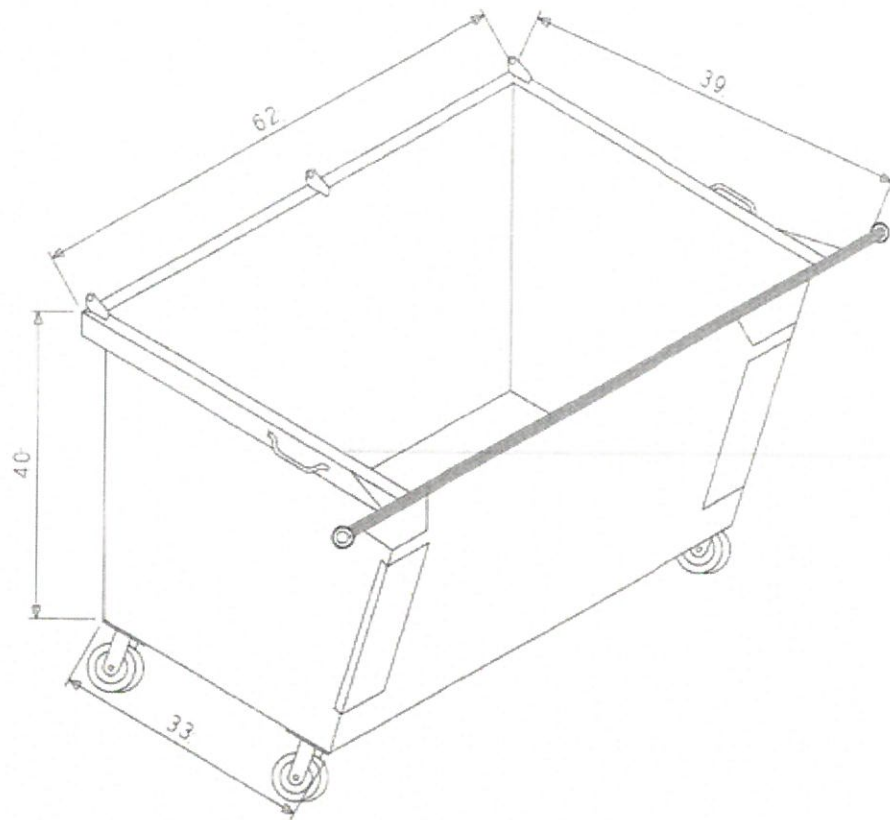


Truck Load: 72

2YD
Rear Load

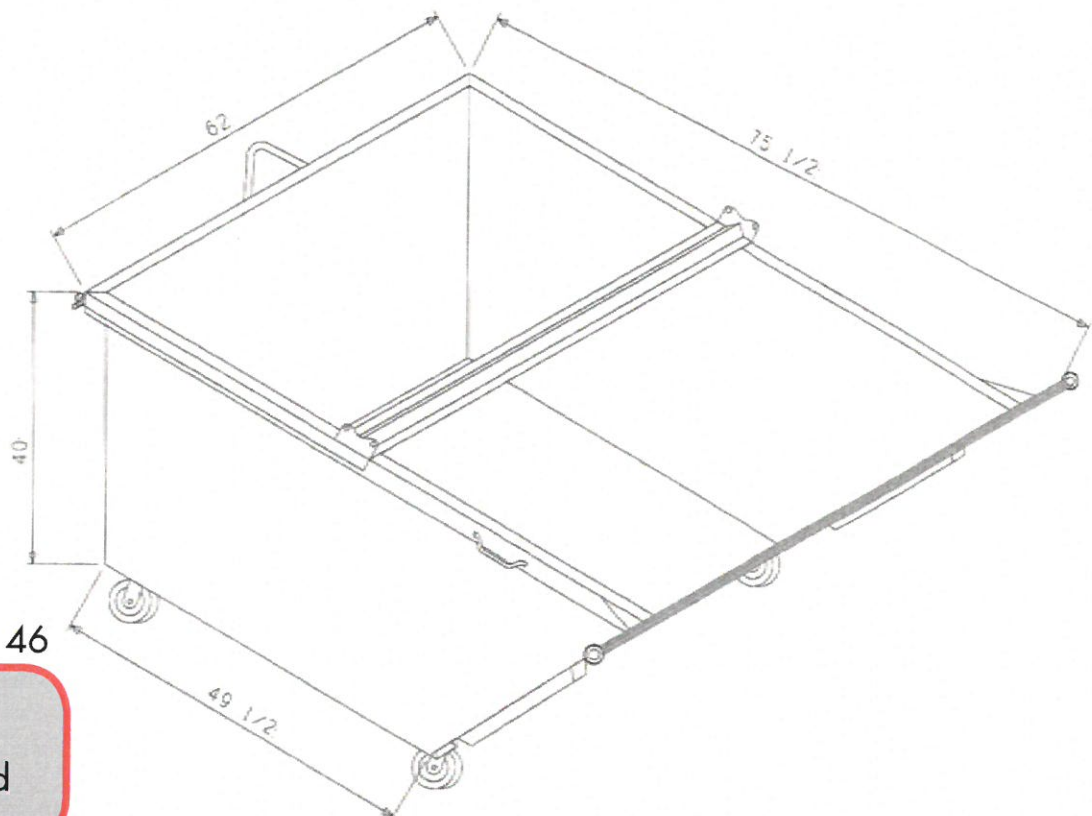


Truck Load: 46

3YD
Rear Load

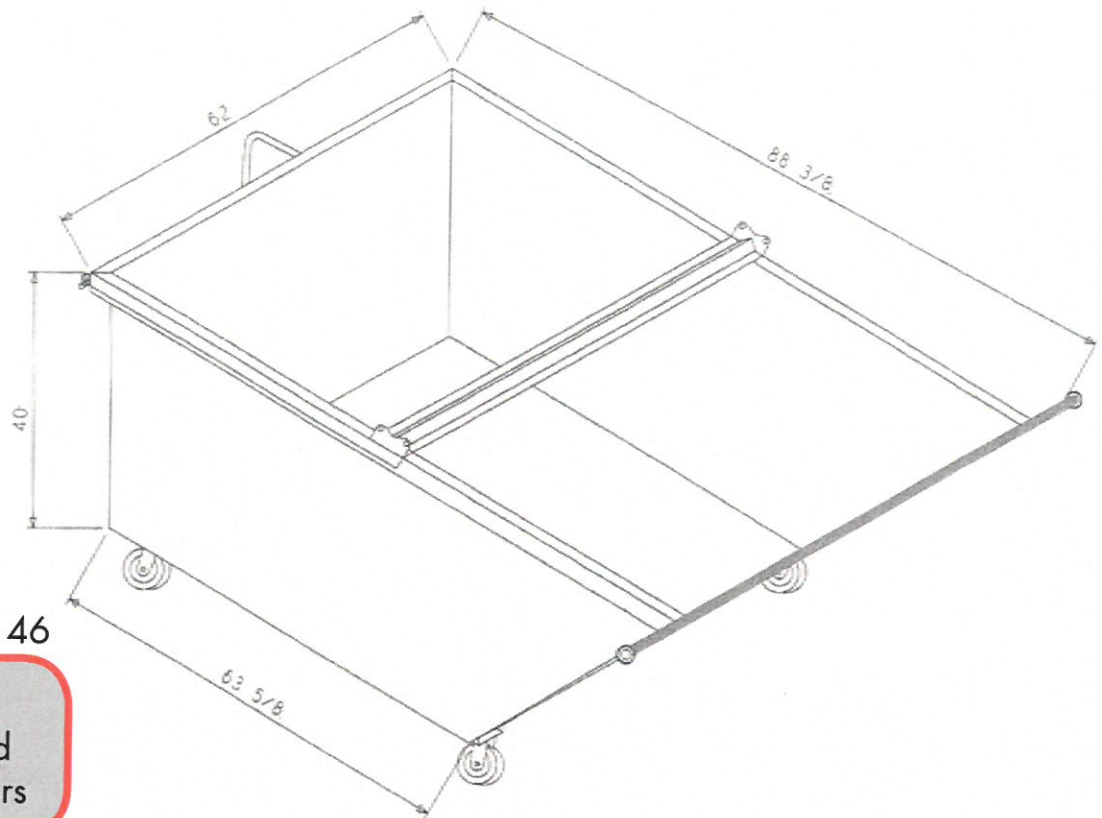


Truck Load: 46

4YD
Rear Load
with Casters

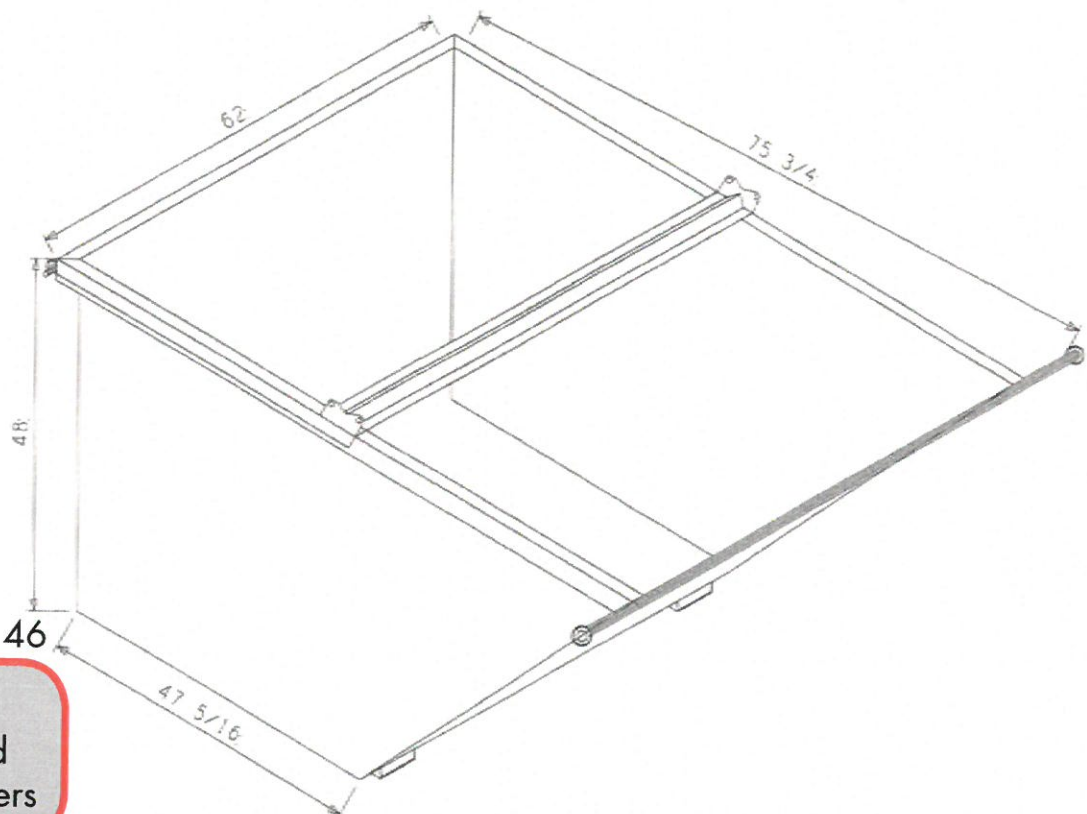


Truck Load: 46

4YD
Rear Load
W/O Casters

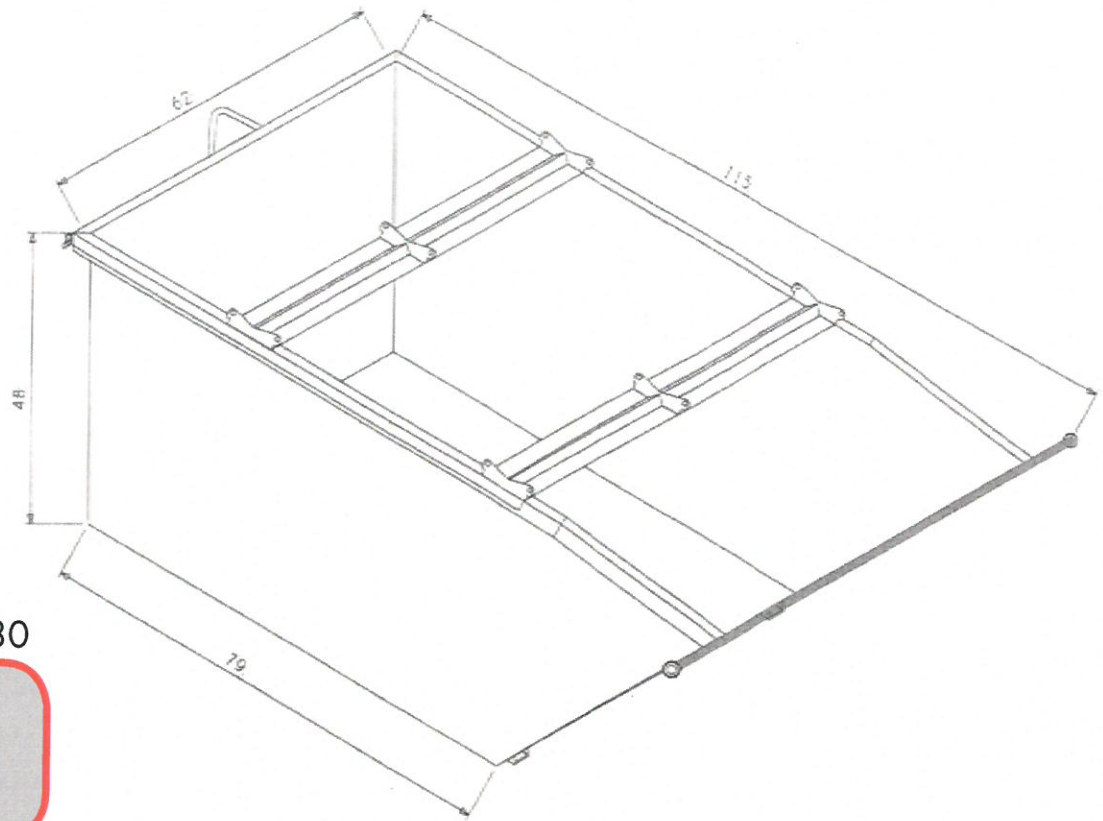

Truck Load: 30

6YD
Rear Load

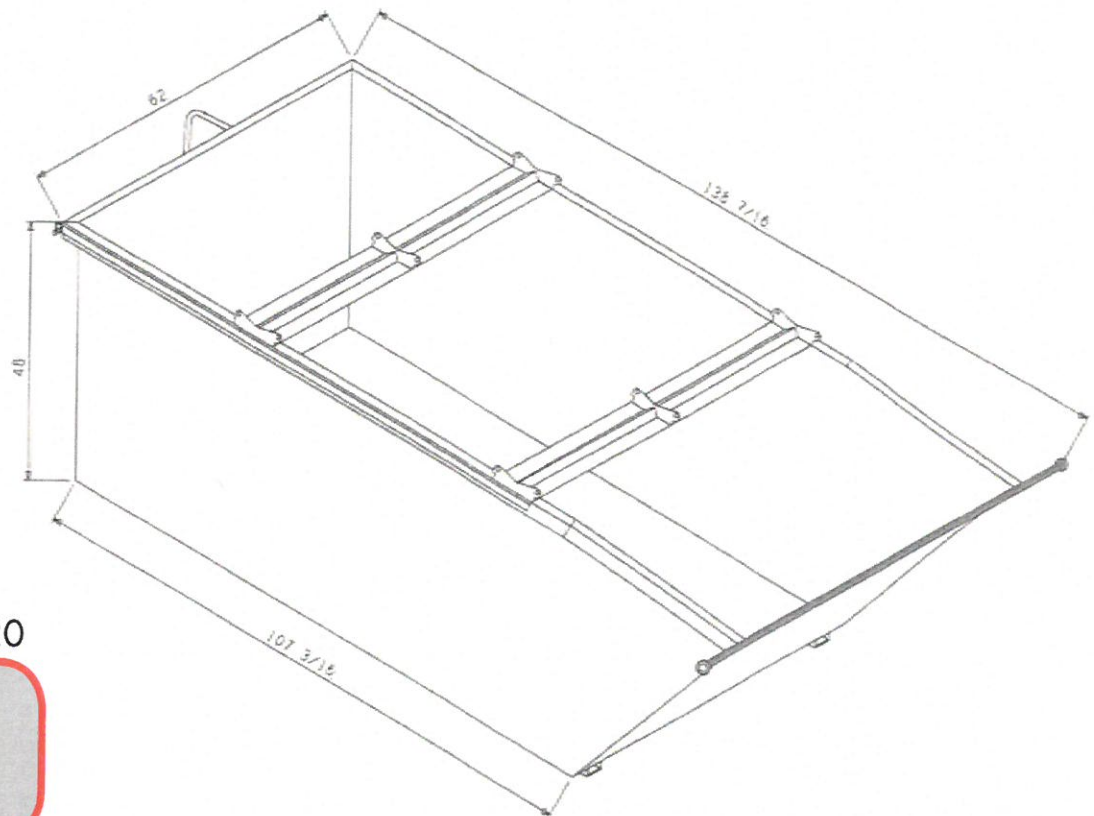

Truck Load: 20

8YD
Rear Load



TO ORDER CALL (800) 468-6826




Side Load Containers


Side Load Specifications:

- 12 ga. Body Panels
- 12 ga. Floor
- 1 ½" x 2 ½" Structural Tubing on Top Rails
- 10 ga. Bottom Runners
- Hookup Options
 - Pak Mor Arms
 - Emco Hooks
 - Others available upon request
- Lid Options
 - 3 pc Plastic
 - ½ Metal with 2/plastic lid
 - All Metal lids

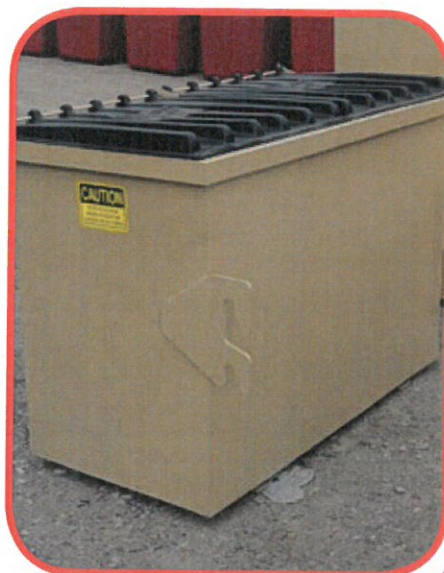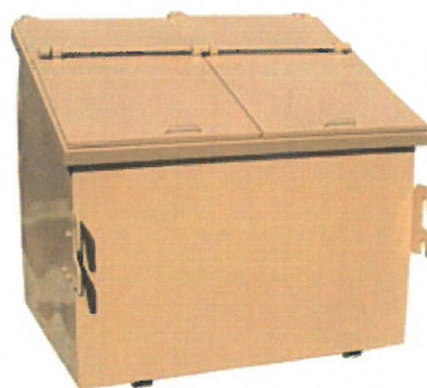


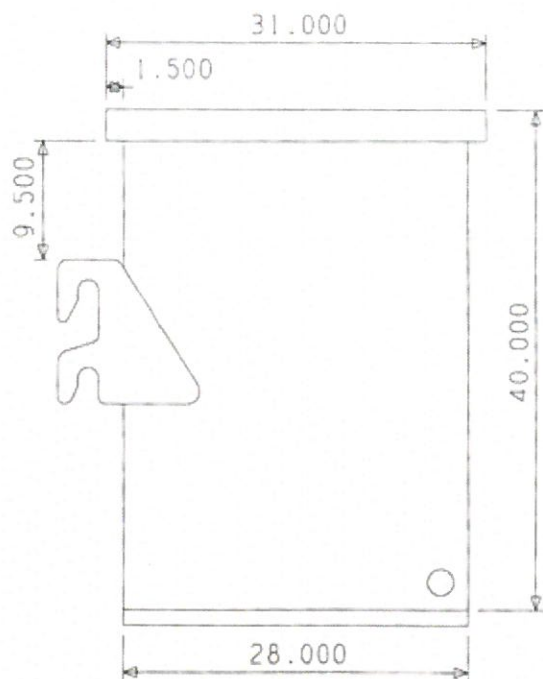


**1 1/2 YARD
SIDE LOAD**

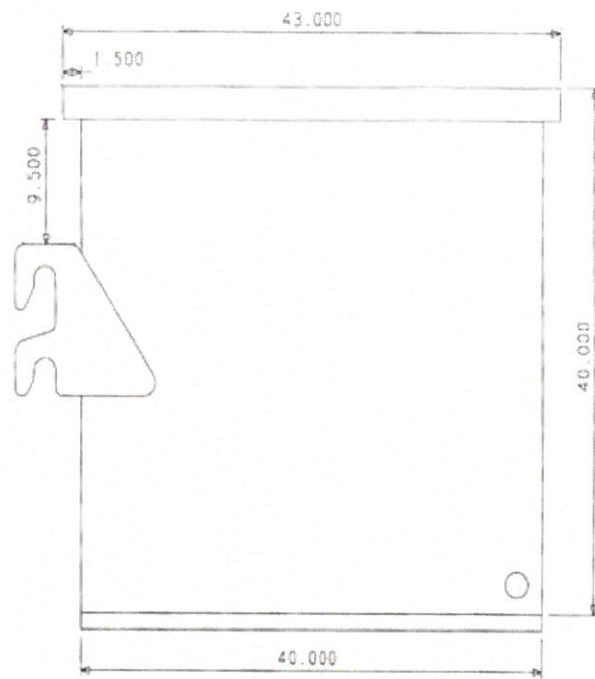

**2 YARD
SIDE LOAD**

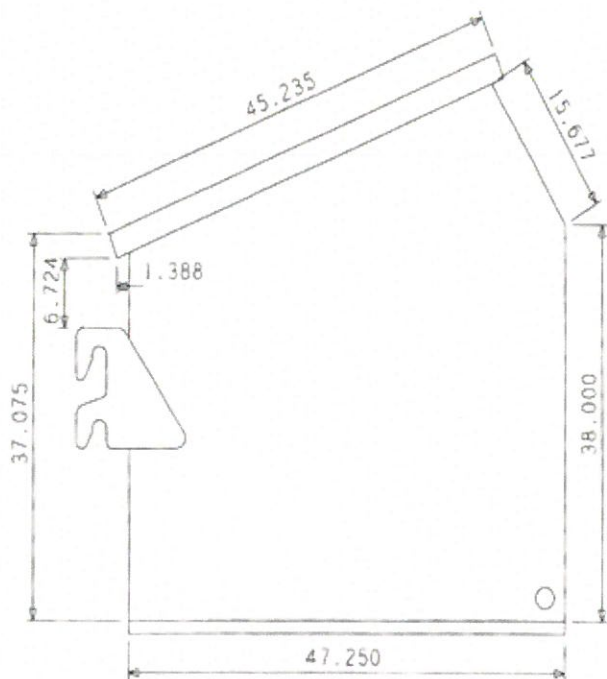

**3 YARD
SIDE LOAD**

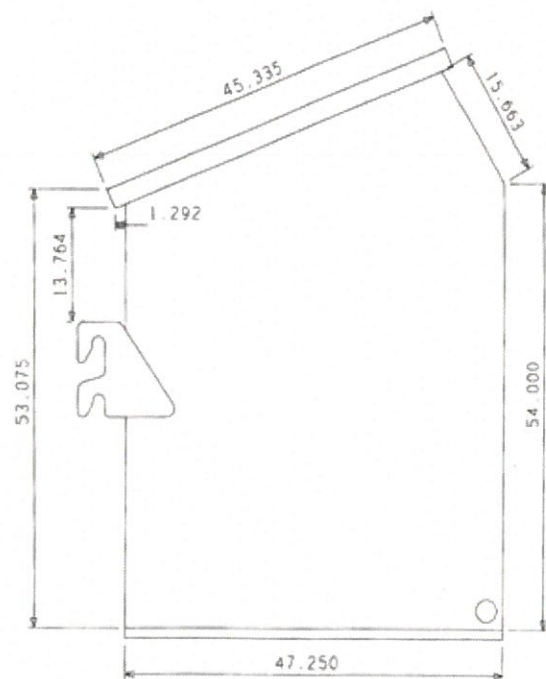

**4 YARD
SIDE LOAD**

TO ORDER CALL (800) 468-6826