




DSX Access Systems, Inc.

## DSX-1043 Intelligent Output Controller

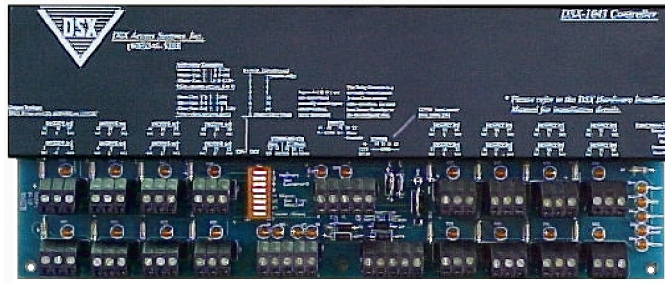

- 16 Programmable Form C Relays
- 4 Time/Day Schedules per Output
- Output Control (Override) Input
- 2 Inputs for point Monitoring
- UL294 / UL1076
- Flexible I/O Linking
- Elevator Control
- 512K RAM / 512K Flash ROM

## **DSX-1043 Output Controller**

### **Size**

DSX-1043 11" W x 4.5" H x 1.5" D

### **Weight**

DSX-1043 1.6 lb.

### **Finish**

Black Powder Coat with White Silkscreen on Enclosure and Black Enamel on DSX-1043.

### **Temperature**

Operating 32 to 131 F  
Storage -35 to 150 F

### **Humidity**

Operating 0 to 95%, relative

### **Power Requirements**

DSX-1043 13.5 VDC @ 800ma from 1040CDM

### **Inputs**

Non-Supervised 2

2 Inputs are used for standard point monitoring.

Relay Override Input 1

**UL Installations require a Tamper Switch to be connected to an Input programmed with a 24hr Time Zone.**

### **Outputs**

Form C Relays 16

Relay Output Ratings 5 AMP 30 VDC

### **Communication Ports**

RS-232 In 1 Master to PC

RS-232 Out 1 Panel to DSX-1040CDM

### **Processor**

AM186 20Mhz

### **RAM/ROM Memory**

Flash ROM 512K

Standard RAM 512K

### **Warranty**

Limited 2 Years