




DSX Access Systems, Inc.

DSX-1044 Intelligent Input Controller

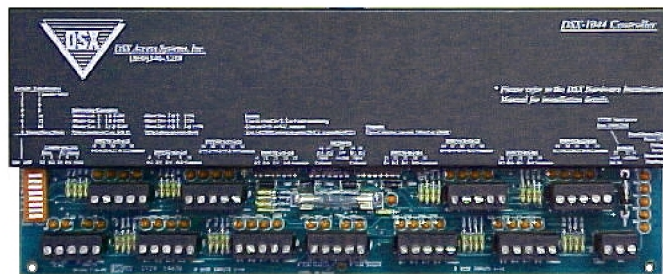

SECURITY
SIGNALING
C UL US
LISTED



- 32 Programmable Inputs
- 2, 3, and 4 State Monitoring
- 4 Digital (open collector) Outputs
- LED Status for each Input
- UL294 / UL1076
- Flexible I/O Linking
- Point Monitoring Applications
- 512K RAM / 512K Flash ROM

DSX-1044 Input Controller

Size

DSX-1044 11" W x 4.5" H x 1.5" D

Weight

DSX-1044 1.2 lb.

Finish

Black Powder Coat with White Silkscreen on Enclosure and Black Enamel on DSX-1044.

Temperature

Operating 32 to 131 F
Storage -35 to 150 F

Humidity

Operating 0 to 95%, relative

Power Requirements

DSX-1044 13.5 VDC @ 550ma from 1040CDM

Inputs

Supervised 32

2, 3, 4 State Monitoring

UL Installations require a Tamper Switch to be connected to an Input programmed with a 24hr Time Zone.

Outputs

Digital (open collector) 4

Output Ratings 12VDC @ 100ma sinking

Communication Ports

RS-232 In 1 Master to PC

RS-232 Out 1 Panel to DSX-1040CDM

Processor

AM186 20Mhz

RAM/ROM Memory

Flash ROM 512K

Standard RAM 512K

Warranty

Limited 2 Years