



STATIONARY COMPACTORS

Features:

- Designed for Commercial and Industrial Applications
- Typically used for Dry Waste applications
- Allen Bradley PLC Controller
- Standard Sizes in 2 to 4 Cu Yd Capacity Charge Box
- Compatible with most 40 Cu Yd Receiving Containers



3-2-1 WARRANTY

3 Years Structure






2 Years Parts

1 Year Labor



STATIONARY COMPACTORS

MODELS	KP-ST2 (2 YD)	KP-ST3 (3YD)	KP-ST4 (4 YD)
Basic Size (Cu Yd)	1.44	2.45	2.97
A - Length (in)	120	174	174
B - Deck Height (in)	48	48	54
C - Width (in)	72.5	72.5	72.5
D - Clear Top Opening L x W	41" x 58"	58" x 68"	58" x 68"
E - Ram Face - W x H	60" x 28"	60" x 28"	60" x 34"
Ram Penetration	13"	13"	13"
Normal Force (lbs)	50,900	50,900	50,900
Normal Pressure (psi)	1,800	1,800	1,800
Maximum Force (lbs)	56,500	56,500	56,500
Maximum Pressure (psi)	2,000	2,000	2,000
Ram Face Width (in)	60	60	60
Ram Face Height (in)	28	28	34
Cycle Time (sec)	60	51	51
Motor (HP)	10	15	15
Pump (GPM)	12	18 1/2	18 1/2
Cylinder Bore (in)	6	6	6
Cylinder Size Rod (in)	2 1/2	4	4
Cylinder Stroke (in)	54	82	82

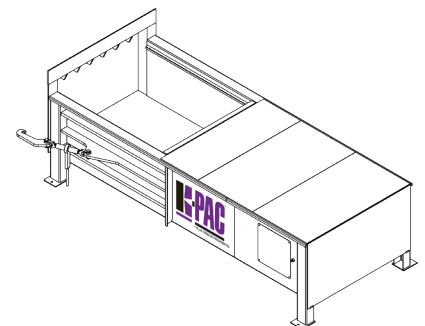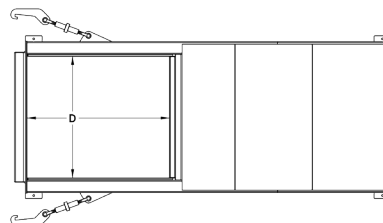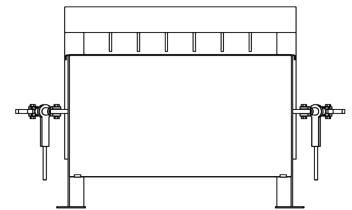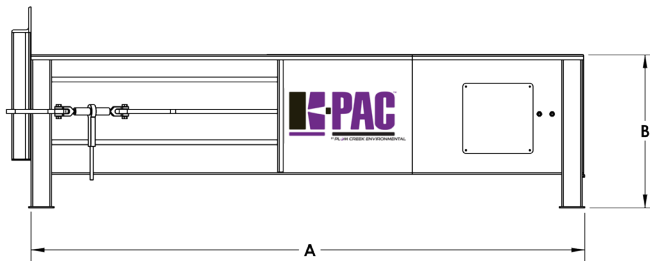

by PLUM CREEK

1302 East Industrial Access Rd West Point, MS 39773 | 662-327-4183 | plumcreeket.com